
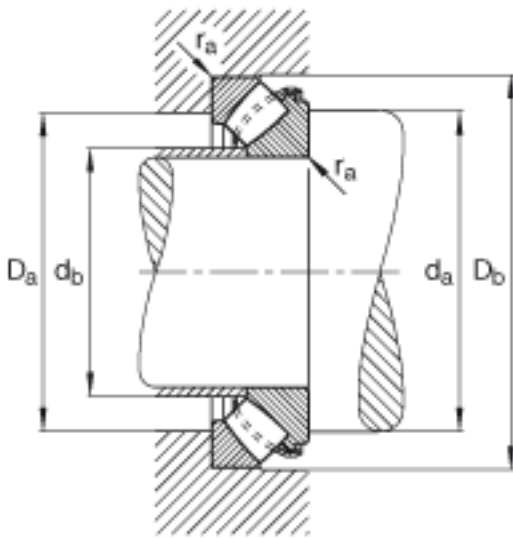


### FAG 29418-E1参数

尺寸	d	90	mm	-
	D	190	mm	-
	T	60	mm	-
	A	56	mm	-
	D <sub>1</sub>	127.5	mm	-
	D <sub>a max</sub>	158	mm	-
	D <sub>b min</sub>	193	mm	-
	d <sub>1</sub>	167.7	mm	-
	d <sub>a min</sub>	135	mm	-
	d <sub>b max</sub>	99.5	mm	-
	r <sub>a max</sub>	2	mm	-
	r <sub>min</sub>	2.1	mm	-
	T <sub>1</sub>	28.5	mm	-
	T <sub>3</sub>	39	mm	-
	T <sub>5</sub>	54	mm	-
重量	m	7500	g	质量
基本额定载荷	C <sub>a</sub>	880000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	2130000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	3850	r/min	极限转速
参考转速	n <sub>B</sub>	1910	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	236000	N	疲劳极限载荷, 轴向

### FAG 29418-E1图片

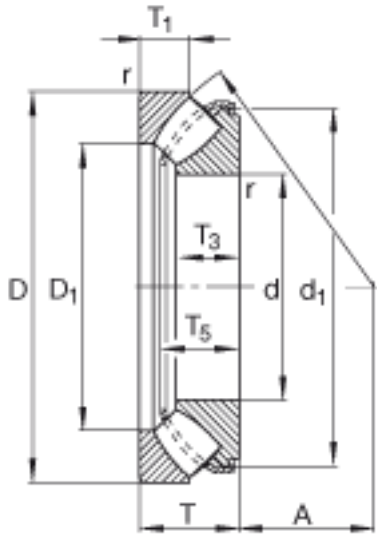

参考资料:<http://www.sozhou.com/p/00f6e0bc.html>

