


## NSK FCRSB-30参数

|         |        |          |       |        |
|---------|--------|----------|-------|--------|
| 型号      | 型号     | FCRSB-30 |       | -      |
| 外形尺寸    | D      | 30       | mm    | 外径     |
|         | C      | 14       | mm    | 宽度     |
|         | SD     | 12       | mm    | 外径     |
| 尺寸      | G      | M12x1.5  | mm    | 螺栓     |
|         | G1     | 13       | mm    | -      |
|         | B1     | 40       | mm    | -      |
|         | B2     | 25.0     | mm    | -      |
|         | B3     | 6        | mm    | -      |
|         | M2     | 3        | mm    | -      |
|         | M1     | 6        | mm    | -      |
|         | R      | 0.6      | mm    | (最小)   |
|         | 基本额定载荷 | CR       | 12500 | N      |
| 极限载荷    | PMAX   | 9250     | N     | 极限载荷   |
| 滚轮极限载荷  | LTL    | 7800     | N     | 滚轮极限载荷 |
| 重量      | MASS   | 88       | g     | 重量     |
| 六角形孔的尺寸 | X      | 6.0      | mm    | 双边距离   |
| 偏心轴衬尺寸  | B4     | 0.0      | mm    | -      |
|         | SD1    |          | mm    | -      |
|         | E      | 0.0      | mm    | -      |
| 挡肩尺寸    | F      | 20.0     | mm    | (最小)   |
| 拧紧力矩    | TT     | 1450     | n. cm | (最大)   |

## NSK FCRSB-30图片



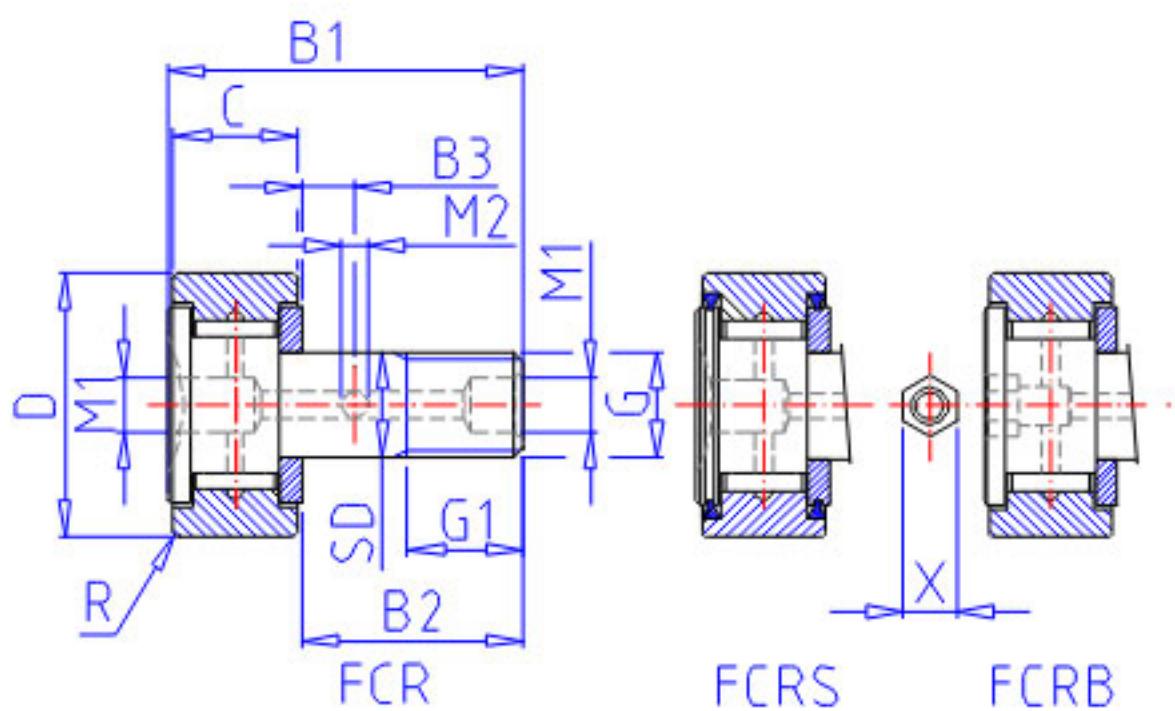

FCRE

参考资料:<http://www.sozhou.com/p/16198238.html>

