


NSK 54415U参数

外形尺寸	T5	123.0	mm	-
	T7	135	mm	-
	SR	2.0	mm	(最小)
	SR1	1.0	mm	(最小)
基本额定载荷	CAN	254000	N	动载荷
	COAN	560000	N	静载荷
	CA	25900	kgf	动载荷
	COA	57000	kgf	静载荷
极限转速	GRE	900	1/min	脂润滑
	OIL	1400	1/min	油润滑
尺寸	SD3	160.0	mm	-
	D1	78	mm	-
	D2	115	mm	-
	D3	165	mm	-
	T2	70.5	mm	-
	T6	74.5	mm	-
	T8	80.5	mm	-
	B	26	mm	-
	SB	21.0	mm	-
	A1	36.5	mm	-
	R	125	mm	-
	安装尺寸	DA	115	mm
SRA		2.0	mm	(最大)
SRB		1.0	mm	(最大)
重量	MASS	13700	g	重量
外形尺寸	T1	115	mm	-
型号	型号	54415U		-
外形尺寸	SD2	60	mm	内径
	SD	75	mm	外径
	D	160	mm	宽度

NSK 54415U图片

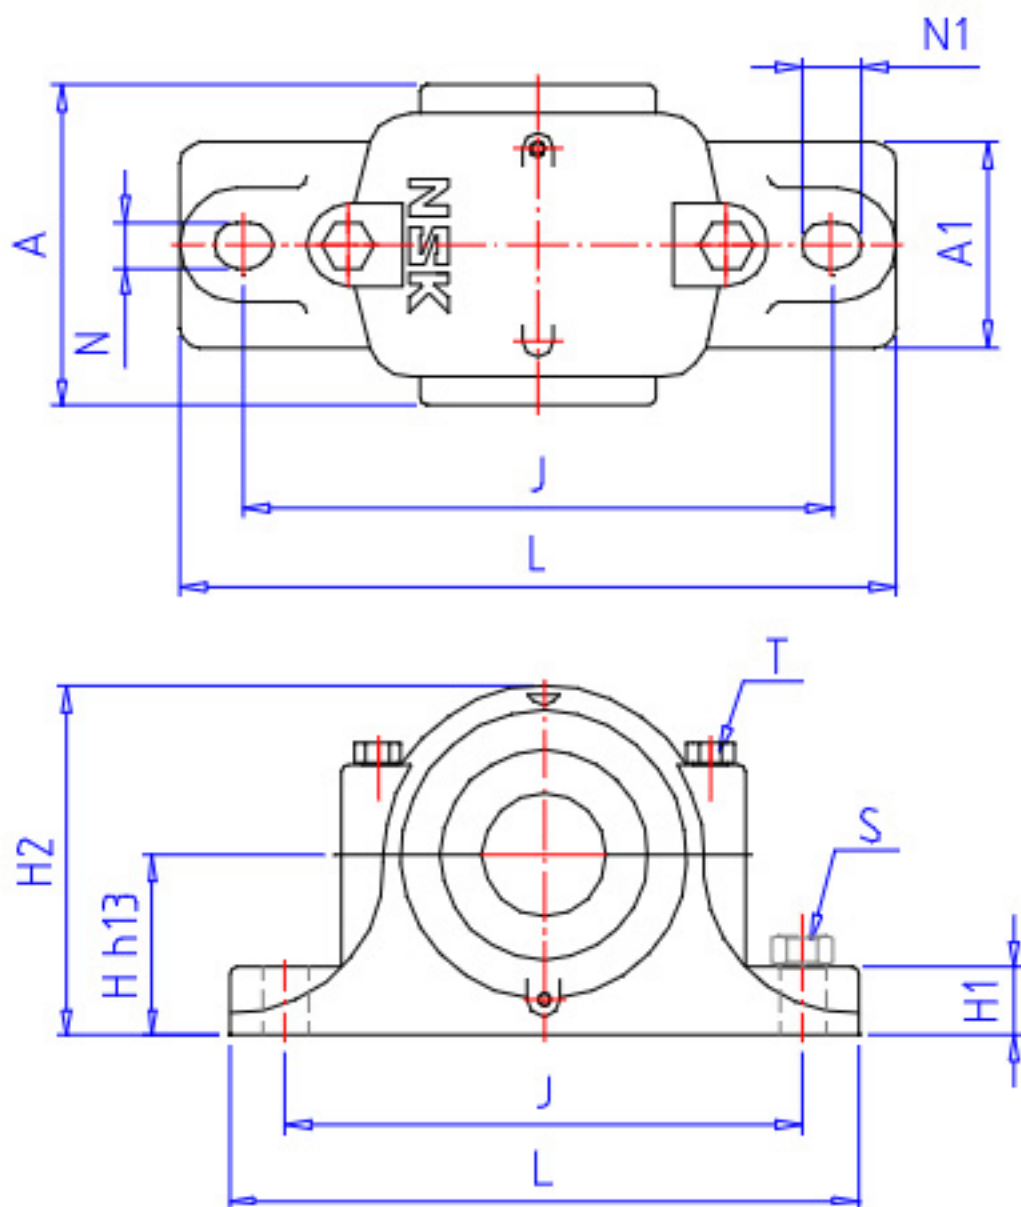

参考资料:<http://www.sozhou.com/p/17d265e1.html>

