

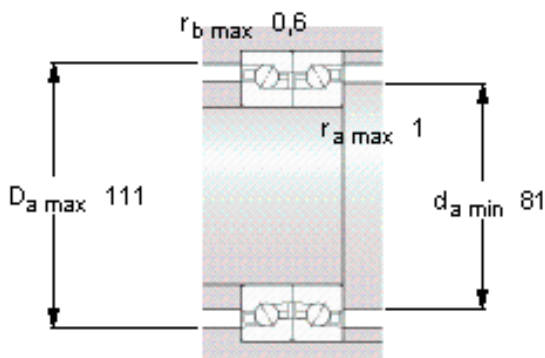


SKF BTM 75 BTN9/HCP4CDBB参数

主要尺寸	d	75	mm	-
	D	115	mm	-
	H	36	mm	-
基本额定载荷	C	32500	N	动载荷
	C_0	69500	N	静载荷
疲劳载荷极限	P_u	2900	N	-
可达转速	Grease	6800	r/min	-
	Oil-air	8000	r/min	-
重量	重量	1200	g	-
型号	型号	BTM 75 BTN9/HCP4CDBB	-	-

SKF BTM 75 BTN9/HCP4CDBB图片

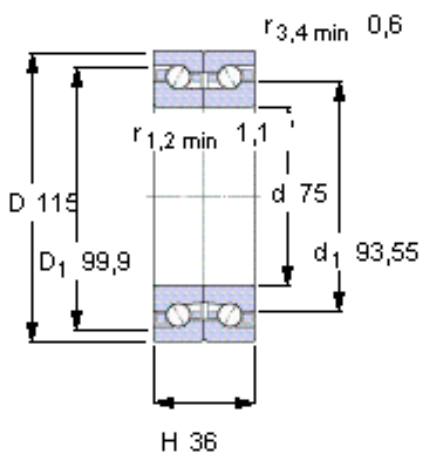

未安装时的预载荷 [N]

1050

Reference grease quantity [cm²]




G_{ref} 11,8

Static axial stiffness [N/μm]

(guideline value)

670

参考资料: <http://www.sozhou.com/p/3344efe1.html>

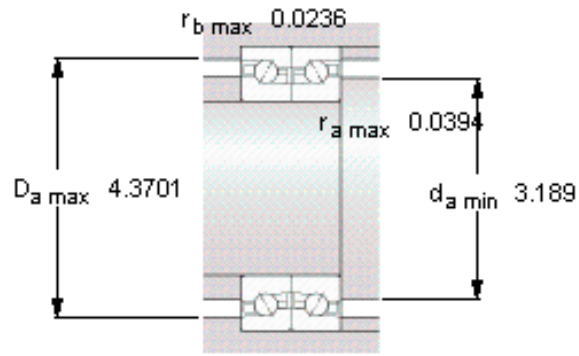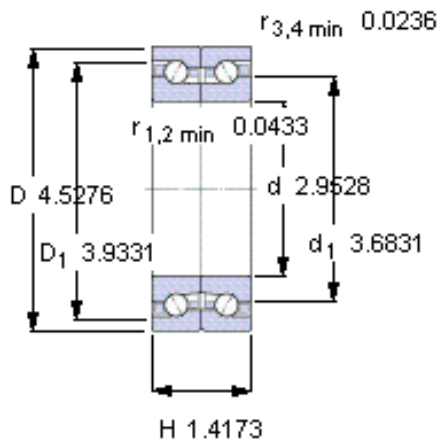

未安装时的预载荷 [N]

1050

Reference grease quantity [cm³]

G_{ref} 11,8

Static axial stiffness [N/ μm]

(guideline value)

670