


FAG NJ2208-E-TVP2 + HJ2208-E参数

尺寸	d	40	mm	-	
	D	80	mm	-	
	B	23	mm	-	
	B ₁	5	mm	-	
	B ₂	9	mm	-	
	D ₁	68.3	mm	-	
	D _{a max}	73	mm	-	
	d ₁	54	mm	-	
	d _{a max}	49	mm	-	
	d _{a min}	47	mm	-	
	d _{c min}	56	mm	-	
	E	71.5	mm	-	
	F	49.5	mm	-	
	r _{1 min}	1.1	mm	-	
	r _{a max}	1	mm	-	
	r _{al max}	1	mm	-	
	r _{min}	1.1	mm	-	
	s	1.5	mm	距离中心位置的轴向偏移	
	说明		HJ2208-E		型号, L 型圈
	重量	m	504	g	质量
m ₁		50	g	质量, L 型圈	
基本额定载荷	C _r	83000	N	基本额定动载荷, 径向	
	C _{0r}	75000	N	基本额定静载荷, 径向	
极限转速	n _G	10900	r/min	极限转速	
参考转速	n _B	6400	r/min	参考速度	
疲劳极限载荷	C _{ur}	12700	N	疲劳极限载荷, 径向	

FAG NJ2208-E-TVP2 + HJ2208-E图片

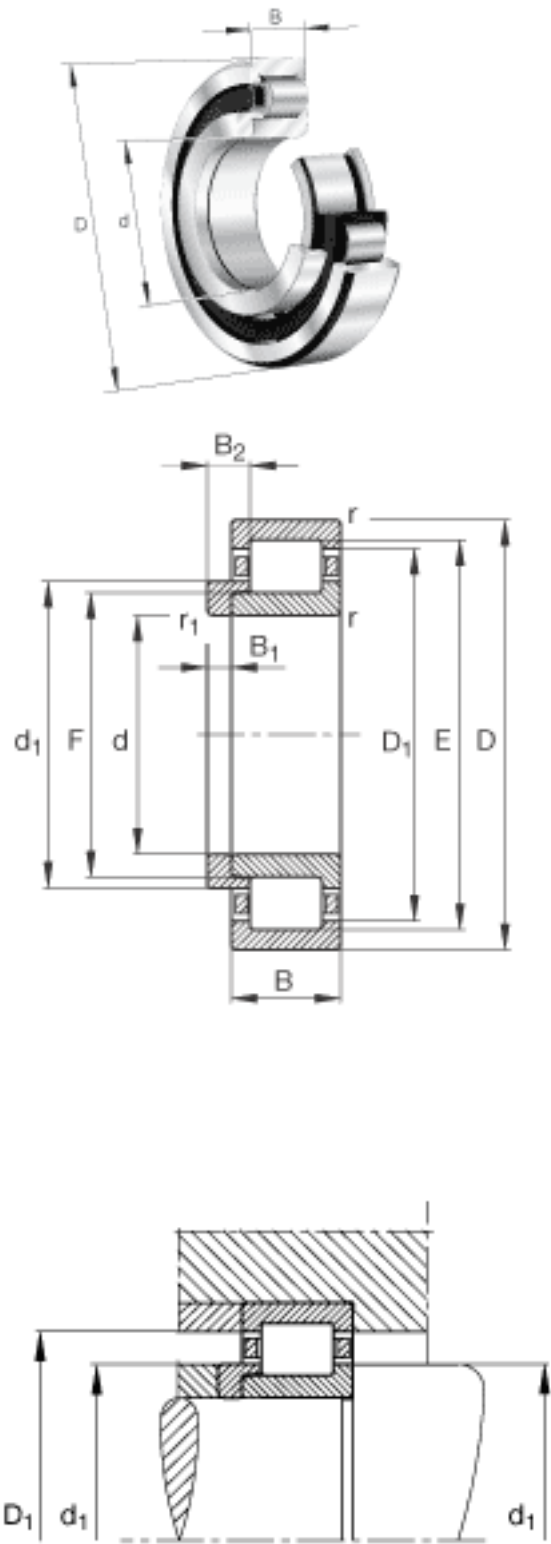

参考资料:<http://www.sozhou.com/p/499e4ad1.html>

