


### FAG 24044-B-K30-MB参数

基本额定载荷	$C_r$	1400000	N	基本额定动载荷，径向
计算系数	$e$	0.34		-
尺寸	$d$	220	mm	-
	$D$	340	mm	-
	$B$	118	mm	-
	$D_1$	297.4	mm	-
	$D_{a\ max}$	327.6	mm	-
	$d_{a\ min}$	232.4	mm	-
	$d_s$	6.3	mm	-
	$n_s$	12.2	mm	-
	$r_{a\ max}$	2.5	mm	-
	$r_{min}$	3	mm	-
	重量	$m$	38900	g
计算系数	$Y_1$	1.96		-
	$Y_2$	2.92		-
基本额定载荷	$C_{0r}$	2700000	N	基本额定静载荷，径向
计算系数	$Y_0$	1.92		-
极限转速	$n_G$	1810	r/min	极限转速
参考转速	$n_B$	1080	r/min	参考速度
疲劳极限载荷	$C_{ur}$	139000	N	疲劳极限载荷，径向

### FAG 24044-B-K30-MB图片



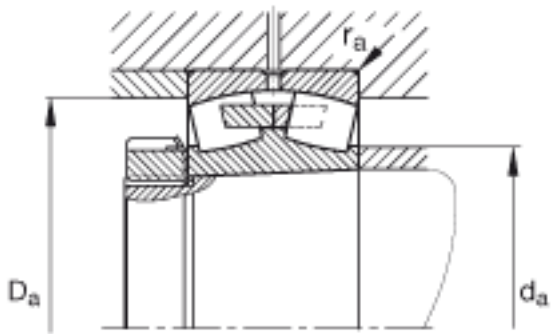

参考资料:<http://www.sozhou.com/p/501a8636.html>