


NSK 54307U参数

外形尺寸	T5	47.2	mm	-	
	T7	52	mm	-	
	SR	1.0	mm	(最小)	
	SR1	0.3	mm	(最小)	
基本额定载荷	CAN	56000	N	动载荷	
	COAN	105000	N	静载荷	
	CA	5700	kgf	动载荷	
	COA	10700	kgf	静载荷	
极限转速	GRE	2400	1/min	脂润滑	
	OIL	3600	1/min	油润滑	
尺寸	SD3	68.0	mm	-	
	D1	37	mm	-	
	D2	52	mm	-	
	D3	72	mm	-	
	T2	27.0	mm	-	
	T6	28.6	mm	-	
	T8	31.0	mm	-	
	B	10	mm	-	
	SB	7.5	mm	-	
	A1	21.0	mm	-	
	R	56	mm	-	
	安装尺寸	DA	52	mm	(最大)
		SRA	1.0	mm	(最大)
SRB		0.3	mm	(最大)	
重量	MASS	915	g	重量	
型号	型号	54307U		-	
外形尺寸	SD2	30	mm	内径	
	SD	35	mm	外径	
	D	68	mm	宽度	
	T1	44	mm	-	

NSK 54307U图片

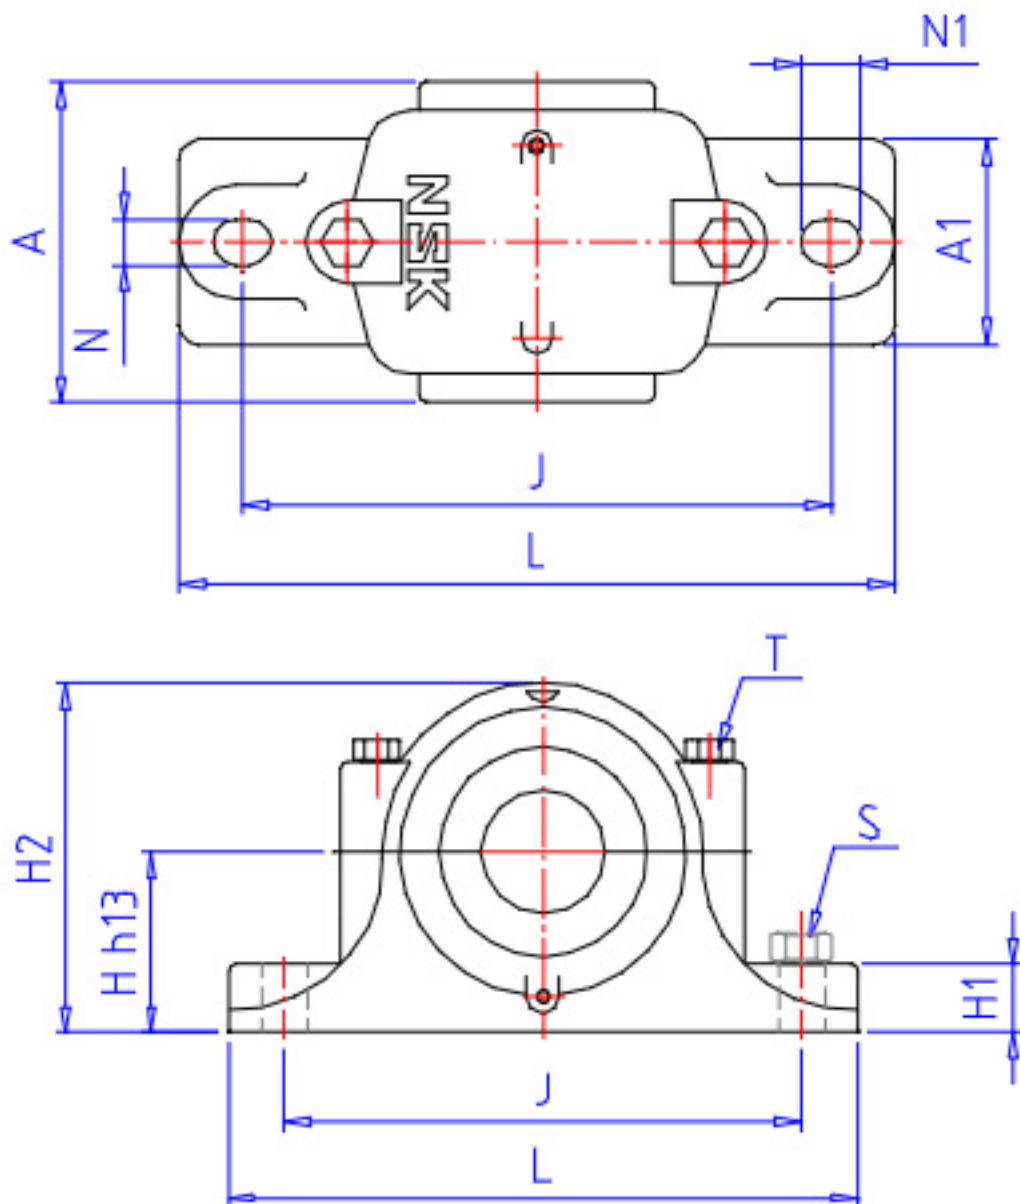

参考资料:<http://www.sozhou.com/p/5588d8a1.html>

