
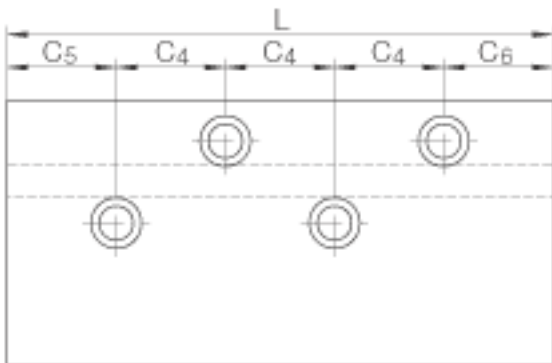
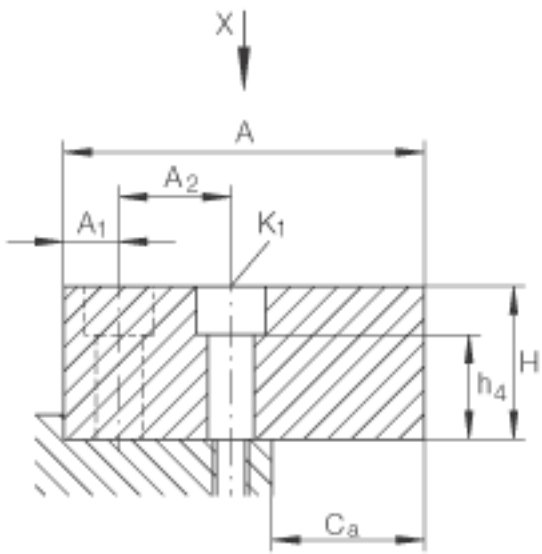


INA UG16260参数

尺寸	A	162	mm	公差: -0, 1
	H	60	mm	公差: -0, 1
	L	3000	mm	最大 L = 标准长度; 适用于从400mm逐渐递 增到 L max的单根导轨 。 中间导轨的长度可 可通过协商定制。长于 Lmax 的导轨可由多根 标准导轨组合供货。 多根导轨的孔的布置方 式在越过联接处仍然是 有规律的。
	A ₁	20	mm	-
	a ₂	44	mm	-
	C ₄	40	mm	-
	C _{5 max}	40	mm	-
	C _{5 min}	20	mm	-
	C _{6 max}	40	mm	-
	C _{6 min}	20	mm	-
	C _a	77	mm	-
	h ₄	35.5	mm	-
	说明	K ₁	M16	

INA UG16260图片

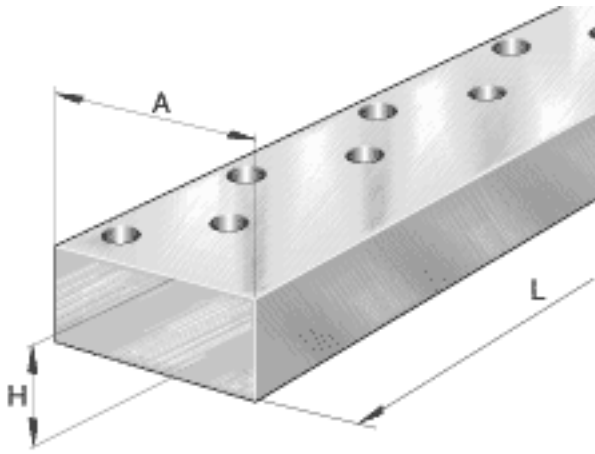

参考资料:<http://www.sozhou.com/p/5aef1750.html>