


FAG 292/1180-E-MB参数

尺寸	T_4	146	mm	-
重量	m	882800	g	质量
尺寸	$r_{a \max}$	8	mm	-
	r_{\min}	9.5	mm	-
	T_1	108	mm	-
	T_2	74	mm	-
	T_3	125	mm	-
	d	1180	mm	-
	D	1520	mm	-
	T	206	mm	-
	A	625	mm	-
	D_1	1330	mm	-
	$D_{a \max}$	1415	mm	-
	$D_{b \min}$	1542	mm	-
	d_1	1455	mm	-
	$d_{a \min}$	1340	mm	-
	$d_{b \max}$	1227	mm	-
基本额定载荷	C_a	10900000	N	基本额定动载荷, 轴向
	C_{0a}	66000000	N	基本额定静载荷, 轴向
极限转速	n_G	380	r/min	极限转速
参考转速	n_B	201	r/min	参考速度
疲劳极限载荷	C_{ua}	0	N	疲劳极限载荷, 轴向

FAG 292/1180-E-MB图片

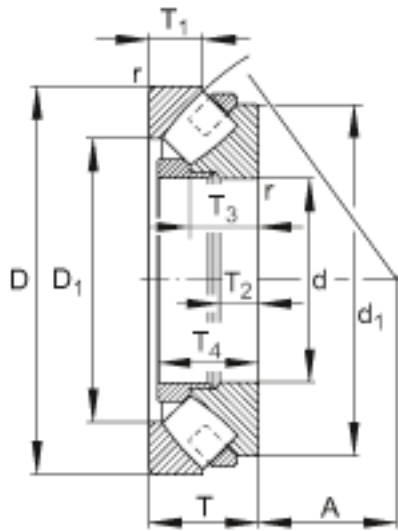

参考资料: <http://www.sozhou.com/p/6612c62e.html>