


FAG NJ2218-E-TVP2 + HJ2218-E参数

尺寸	$D_{a\ max}$	149	mm	-
	d_1	114.3	mm	-
	$d_{a\ max}$	105	mm	-
	$d_{a\ min}$	101	mm	-
	$d_{c\ min}$	116	mm	-
	E	145	mm	-
	F	107	mm	-
	$r_{l\ min}$	2	mm	-
	$r_{a\ max}$	2	mm	-
	$r_{al\ max}$	2	mm	-
	r_{min}	2	mm	-
		s	2.5	mm
说明		HJ2218-E		型号, L 型圈
重量	m	3230	g	质量
	m_1	323	g	质量, L 型圈
基本额定载荷	C_r	285000	N	基本额定动载荷, 径向
	C_{0r}	315000	N	基本额定静载荷, 径向
极限转速	n_G	5200	r/min	极限转速
参考转速	n_B	3300	r/min	参考速度
疲劳极限载荷	C_{ur}	55000	N	疲劳极限载荷, 径向
尺寸	B_1	9	mm	-
	B_2	15	mm	-
	D_1	139.7	mm	-
	d	90	mm	-
	D	160	mm	-
	B	40	mm	-

FAG NJ2218-E-TVP2 + HJ2218-E图片

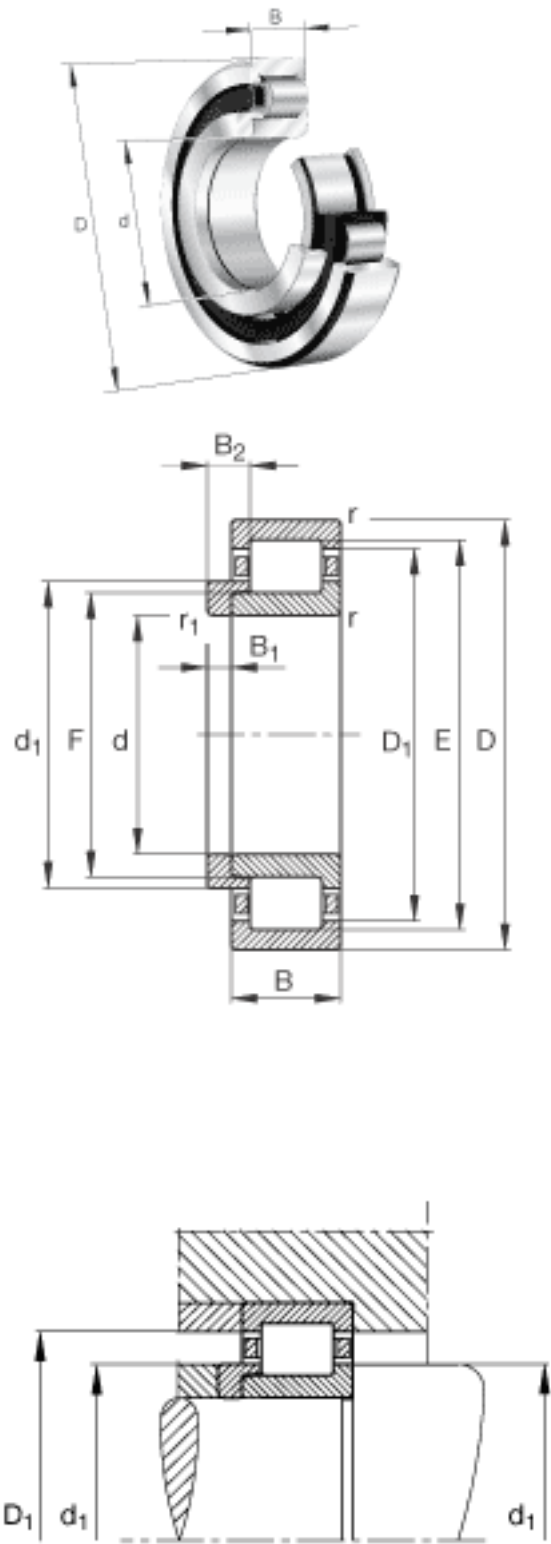

参考资料:<http://www.sozhou.com/p/6b9050fa.html>

