


### FAG NUP306-E-TVP2参数

尺寸	d	30	mm	-
	D	72	mm	-
	B	19	mm	-
	B <sub>3</sub>	3.5	mm	-
	D <sub>1</sub>	59.2	mm	-
	D <sub>a max</sub>	65	mm	-
	d <sub>1</sub>	45	mm	-
	d <sub>a max</sub>	40	mm	-
	d <sub>a min</sub>	37	mm	-
	d <sub>c min</sub>	48	mm	-
	F	40.5	mm	-
	r <sub>1 min</sub>	1.1	mm	-
	r <sub>a max</sub>	1	mm	-
	r <sub>al max</sub>	1	mm	-
	r <sub>min</sub>	1.1	mm	-
	s	0	mm	距离中心位置的轴向偏移
重量	m	385	g	质量
基本额定载荷	C <sub>r</sub>	61000	N	基本额定动载荷，径向
	C <sub>0r</sub>	48000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	12400	r/min	极限转速
参考转速	n <sub>B</sub>	9000	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	7700	N	疲劳极限载荷，径向

### FAG NUP306-E-TVP2图片

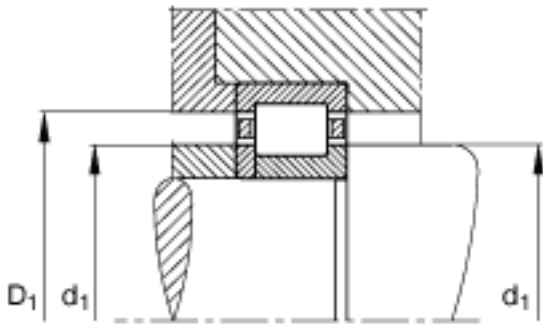

参考资料:<http://www.sozhou.com/p/6c7f2b6a.html>

