


### SKF BSA 207 C参数

主要尺寸	d	35	mm	-
	D	72	mm	-
	H	17	mm	-
基本额定载荷	C	36500	N	动载荷
	$C_0$	98000	N	静载荷
疲劳载荷极限	$P_u$	3650	N	-
可达转速	Grease lubrication	7500	r/min	-
	Oil-air lubrication	9000	r/min	-
重量	重量	330	g	-
型号	型号	BSA 207 C	-	-

### SKF BSA 207 C图片

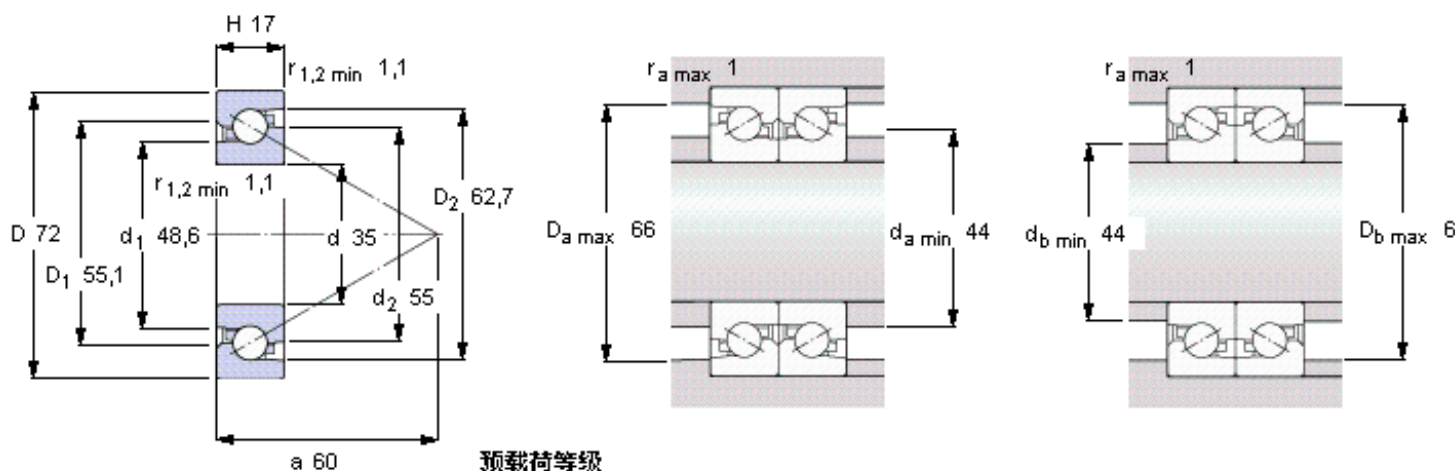

**Preload<sup>1)</sup> [N]**

**Frictional moment<sup>1)</sup> [Nm]**  
(guideline value)

**Static axial stiffness<sup>1)</sup> [N/μm]**  
(guideline value)

<sup>1)</sup> Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face




**预载荷等级**

	A	B
Preload <sup>1)</sup> [N]	2950	5900
Frictional moment <sup>1)</sup> [Nm] (guideline value)	0,18	0,32
Static axial stiffness <sup>1)</sup> [N/μm] (guideline value)	1080	1370

**Max. axial load carrying capacity**  
(guideline value)

**Reference grease quantity [cm<sup>3</sup>]**  
 $G_{ref}$  3

参考资料: <http://www.sozhou.com/p/7b94ae23.html>

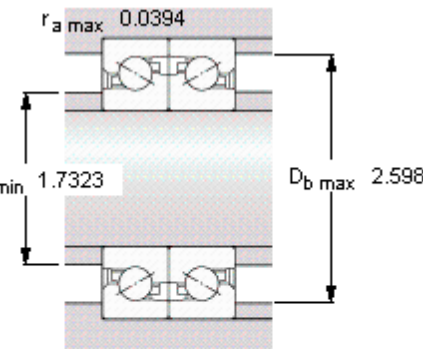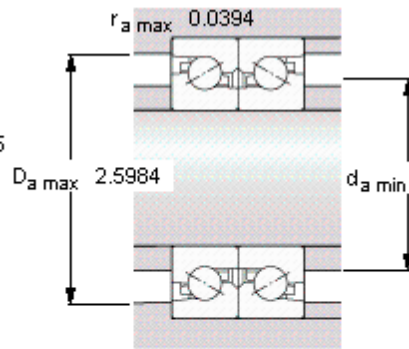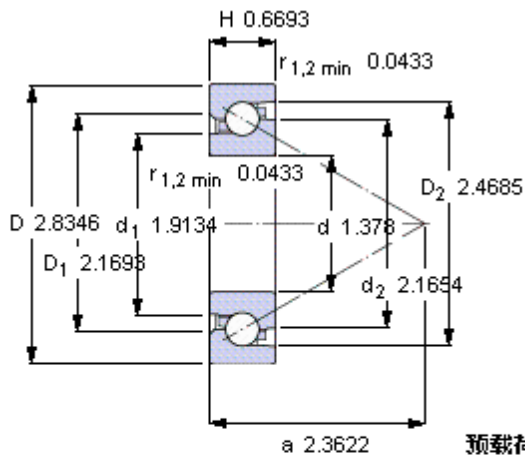

**预载荷等级**

**Preload<sup>1)</sup> [N]**

	A	B
Preload <sup>1)</sup> [N]	2950	5900

**Frictional moment<sup>1)</sup> [Nm]**

(guideline value)

Frictional moment <sup>1)</sup> [Nm]	0,18	0,32
--------------------------------------	------	------

**Static axial stiffness<sup>1)</sup> [N/μm]**

(guideline value)

Static axial stiffness <sup>1)</sup> [N/μm]	1080	1370
---	------	------

**Max. axial load carrying capacity**

(guideline value)

29,6

**Reference grease quantity [cm<sup>3</sup>]**

G<sub>ref</sub> 3

<sup>1)</sup> Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face