


NSK 54405U参数

型号	型号	54405U		-	
外形尺寸	SD2	15	mm	内径	
	SD	25	mm	外径	
	D	60	mm	宽度	
	T1	45	mm	-	
	T5	49.8	mm	-	
	T7	55	mm	-	
	SR	1.0	mm	(最小)	
	SR1	0.6	mm	(最小)	
基本额定载荷	CAN	56000	N	动载荷	
	COAN	89500	N	静载荷	
	CA	5700	kgf	动载荷	
	COA	9100	kgf	静载荷	
极限转速	GRE	2400	1/min	脂润滑	
	OIL	3600	1/min	油润滑	
尺寸	SD3	60.0	mm	-	
	D1	27	mm	-	
	D2	42	mm	-	
	D3	62	mm	-	
	T2	28.0	mm	-	
	T6	30.4	mm	-	
	T8	33.0	mm	-	
	B	11	mm	-	
	SB	8.0	mm	-	
	A1	15.0	mm	-	
	R	50	mm	-	
	安装尺寸	DA	42	mm	(最大)
		SRA	1.0	mm	(最大)
SRB		0.6	mm	(最大)	
重量	MASS	825	g	重量	

NSK 54405U图片

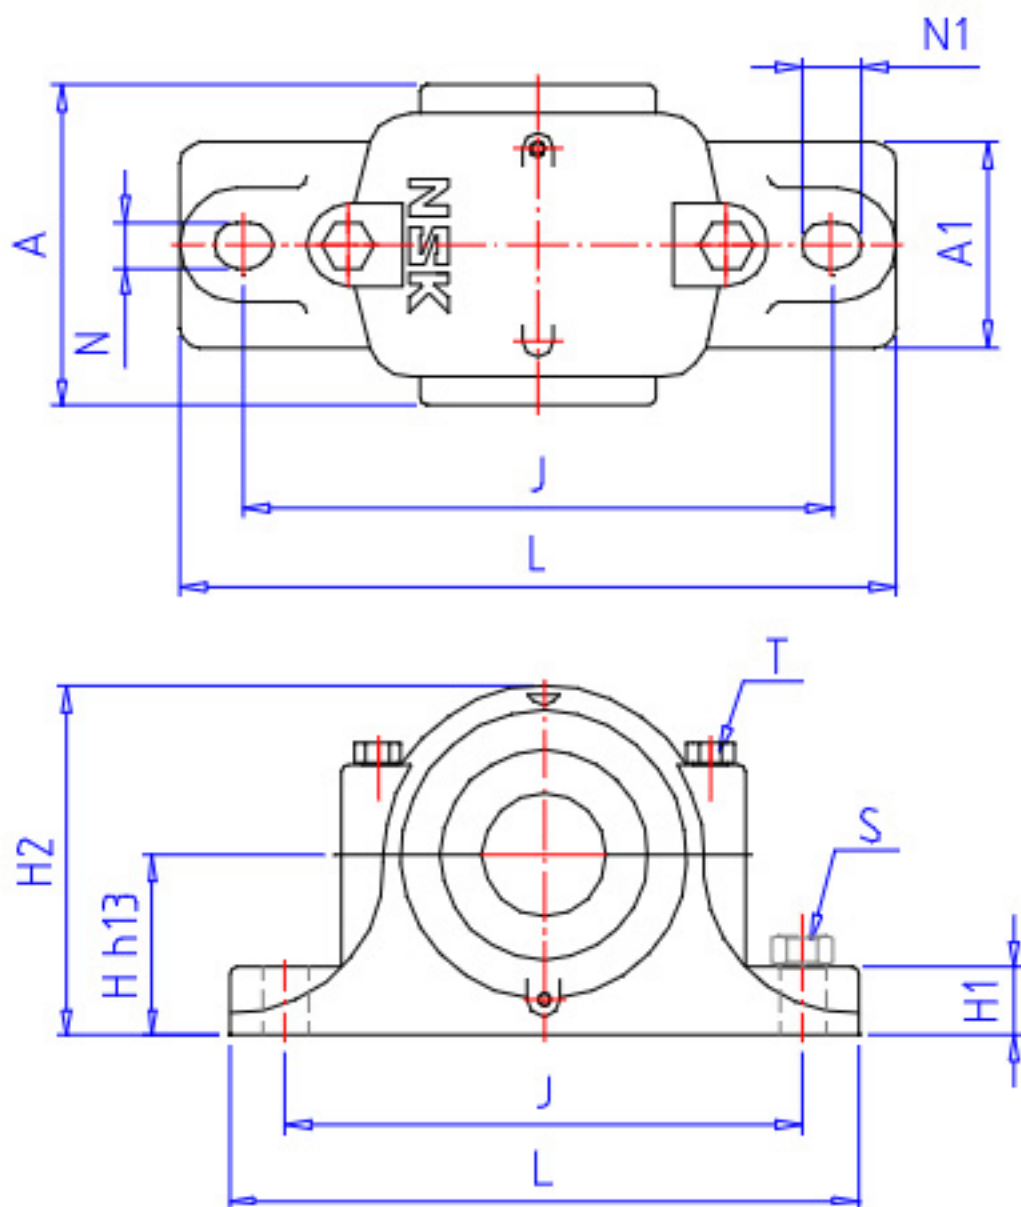

参考资料:<http://www.sozhou.com/p/7c298a0e.html>

