


NSK 54316U参数

外形尺寸	SR	1.5	mm	(最小)	
	SR1	1.0	mm	(最小)	
基本额定载荷	CAN	164000	N	动载荷	
	COAN	395000	N	静载荷	
	CA	16700	kgf	动载荷	
	COA	40000	kgf	静载荷	
极限转速	GRE	1200	1/min	脂润滑	
	OIL	1800	1/min	油润滑	
尺寸	SD3	140.0	mm	-	
	D1	82	mm	-	
	D2	110	mm	-	
	D3	145	mm	-	
	T2	48.5	mm	-	
	T6	52.1	mm	-	
	T8	56.5	mm	-	
	B	18	mm	-	
	SB	15.0	mm	-	
	A1	45.5	mm	-	
	R	112	mm	-	
	安装尺寸	DA	110	mm	(最大)
		SRA	1.5	mm	(最大)
		SRB	1.0	mm	(最大)
重量	MASS	6610	g	重量	
型号	型号	54316U		-	
外形尺寸	SD2	65	mm	内径	
	SD	80	mm	外径	
	D	140	mm	宽度	
	T1	79	mm	-	
	T5	86.2	mm	-	
	T7	95	mm	-	

NSK 54316U图片

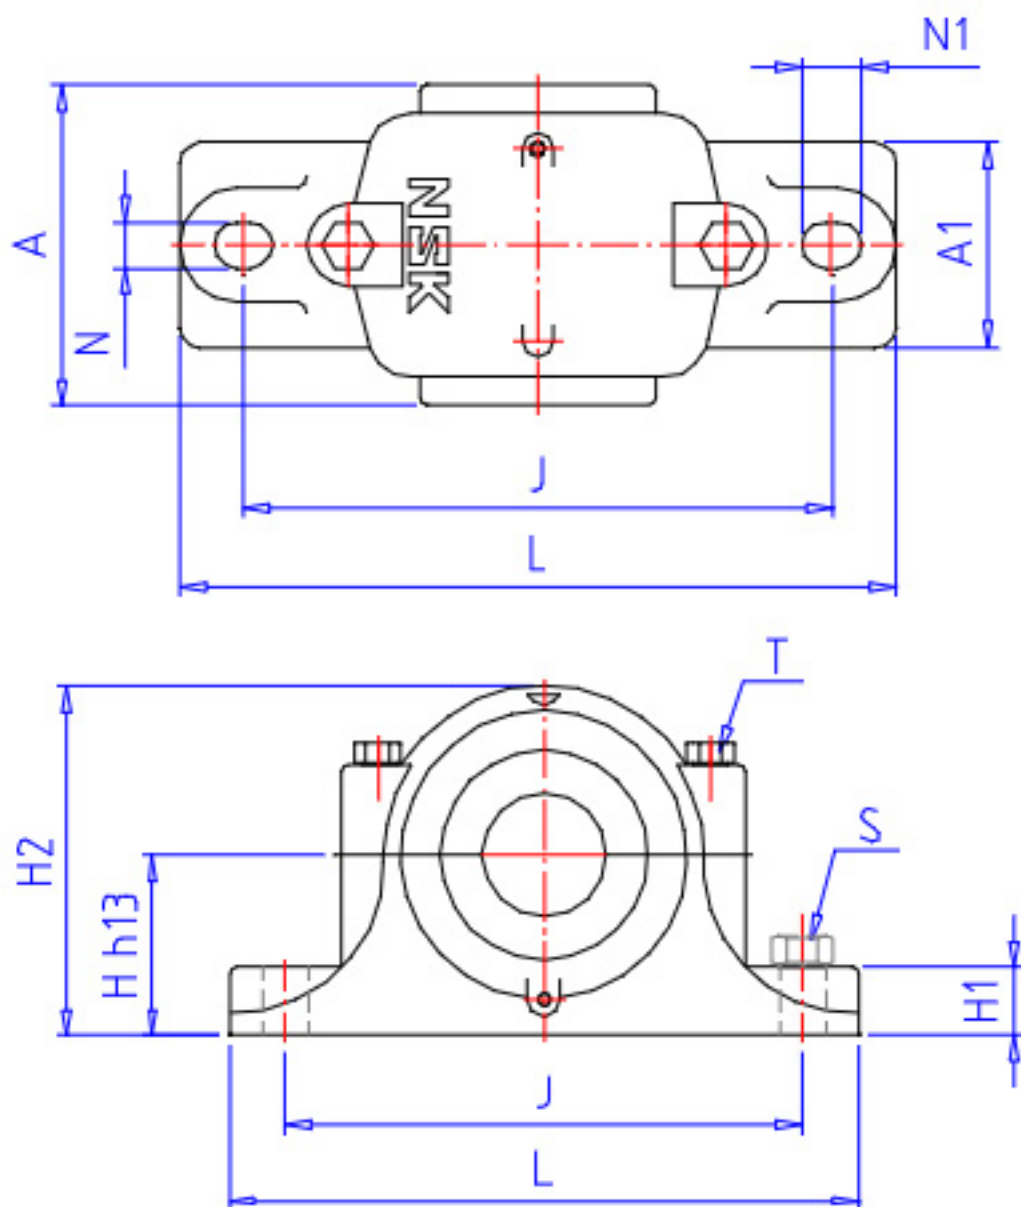

参考资料:<http://www.sozhou.com/p/8be12dcf.html>

