

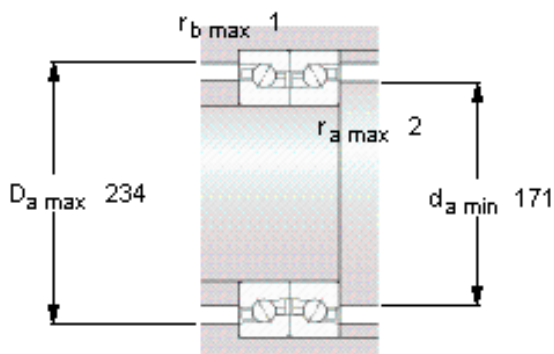


SKF BTM 160 AM/HCP4CDBA参数

主要尺寸	d	160	mm	-
	D	240	mm	-
	H	72	mm	-
基本额定载荷	C	98000	N	动载荷
	C_0	260000	N	静载荷
疲劳载荷极限	P_u	7800	N	-
可达转速	Grease	4900	r/min	-
	Oil-air	5800	r/min	-
重量	重量	11000	g	-
型号	型号	BTM 160 AM/HCP4CDBA	-	-

SKF BTM 160 AM/HCP4CDBA图片

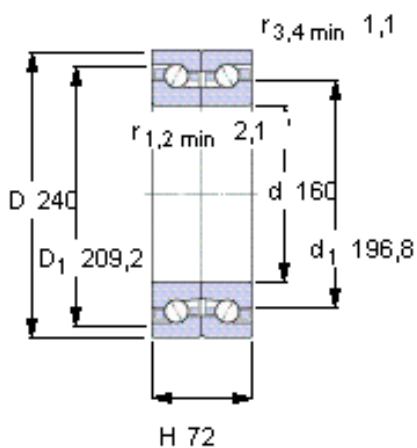

未安装时的预载荷 [N]

1100

Reference grease quantity [cm³]




G_{ref} 94

Static axial stiffness [N/ μm]

(guideline value)

573

参考资料:<http://www.sozhou.com/p/9c3a5722.html>

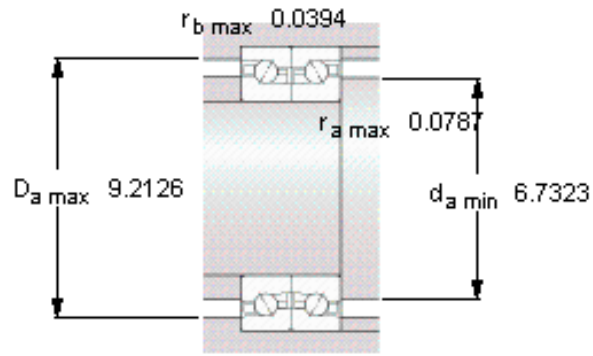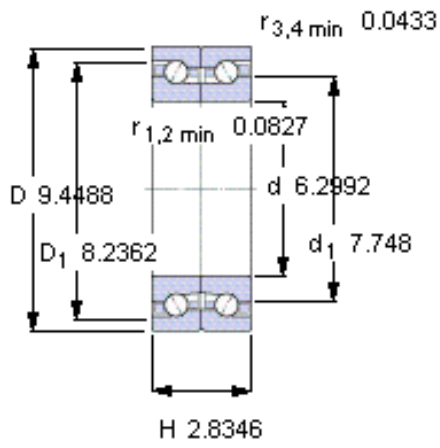

未安装时的预载荷 [N]

1100

Reference grease quantity [cm³]

G_{ref} 94

Static axial stiffness [N/ μm]

(guideline value)

573