


FAG NJ2319-E-TVP2 + HJ2319-E参数

尺寸	F	121.5	mm	-
	$r_{1\ min}$	3	mm	-
	$r_{a\ max}$	2.5	mm	-
	$r_{a1\ max}$	2.5	mm	-
	r_{\min}	3	mm	-
	s	5.6	mm	距离中心位置的轴向偏移
说明		HJ2319-E		型号, L 型圈
重量	m	9580	g	质量
	m_1	830	g	质量, L 型圈
基本额定载荷	C_r	540000	N	基本额定动载荷, 径向
	C_{0r}	580000	N	基本额定静载荷, 径向
极限转速	n_G	4050	r/min	极限转速
参考转速	n_B	2850	r/min	参考速度
疲劳极限载荷	C_{ur}	99000	N	疲劳极限载荷, 径向
尺寸	d	95	mm	-
	D	200	mm	-
	B	67	mm	-
	B_1	13	mm	-
	B_2	24.5	mm	-
	D_1	169.6	mm	-
	$D_{a\ max}$	186	mm	-
	d_1	132	mm	-
	$d_{a\ max}$	119	mm	-
	$d_{a\ min}$	109	mm	-
	$d_{c\ min}$	134	mm	-
	E	177.5	mm	-

FAG NJ2319-E-TVP2 + HJ2319-E图片

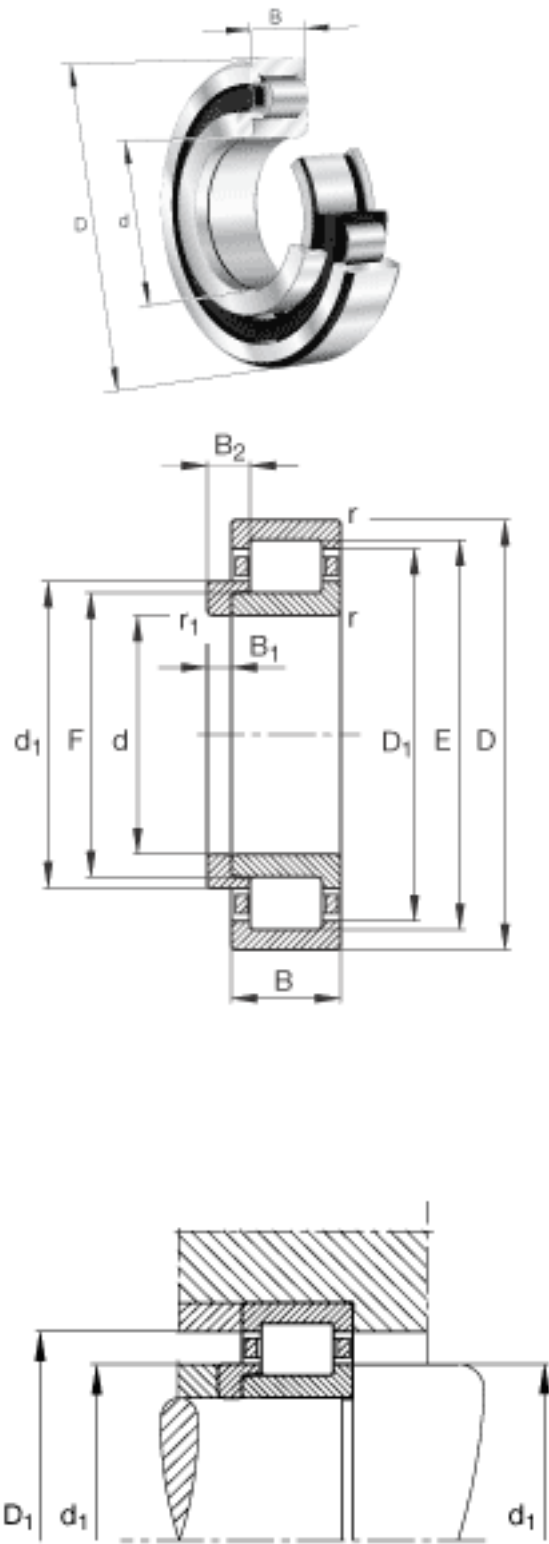

参考资料:<http://www.sozhou.com/p/d0d2d0e9.html>

