


SKF BSD 2562 C参数

主要尺寸	d	25	mm	-
	D	62	mm	-
	H	15	mm	-
基本额定载荷	C	28500	N	动载荷
	C_0	71000	N	静载荷
疲劳载荷极限	P_u	2650	N	-
可达转速	Grease lubrication	8000	r/min	-
	Oil-air lubrication	9500	r/min	-
重量	重量	240	g	-
型号	型号	BSD 2562 C	-	-

SKF BSD 2562 C图片

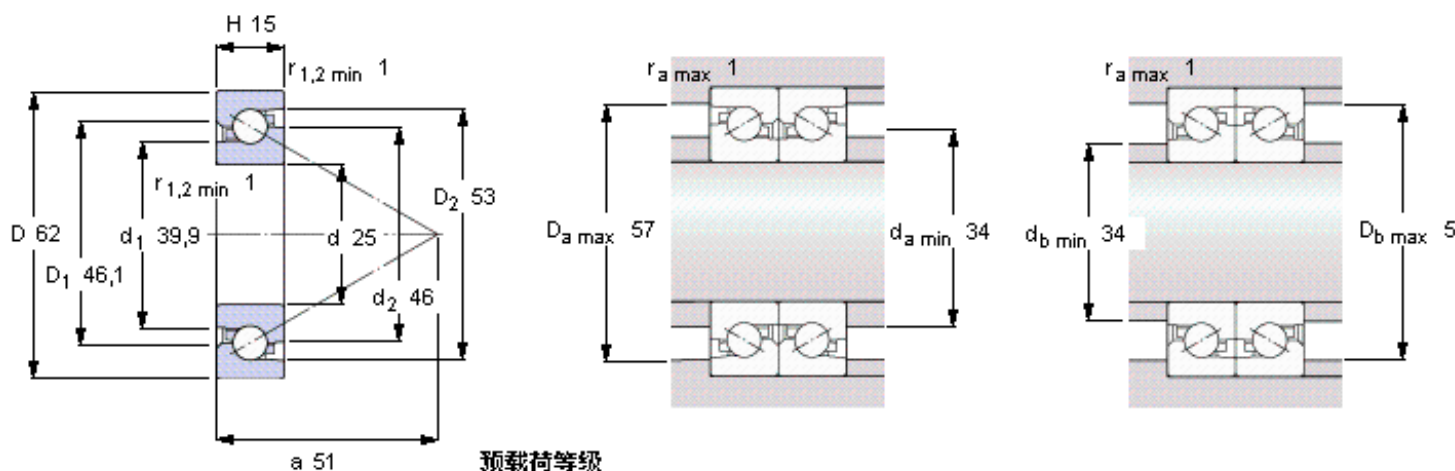

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face




预载荷等级

	A	B
Preload ¹⁾ [N]	2150	4300
Frictional moment ¹⁾ [Nm] (guideline value)	0,115	0,21
Static axial stiffness ¹⁾ [N/μm] (guideline value)	870	1110

Max. axial load carrying capacity
(guideline value)

Reference grease quantity [cm³]
 $G_{ref} \quad 2$

参考资料: <http://www.sozhou.com/p/d10182d2.html>

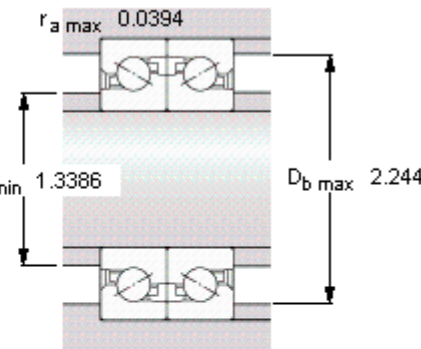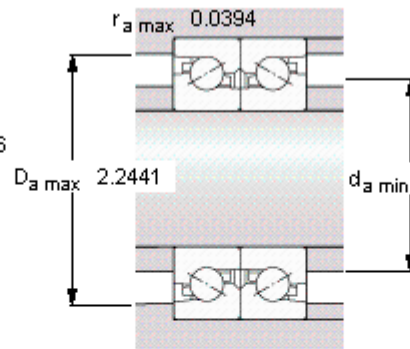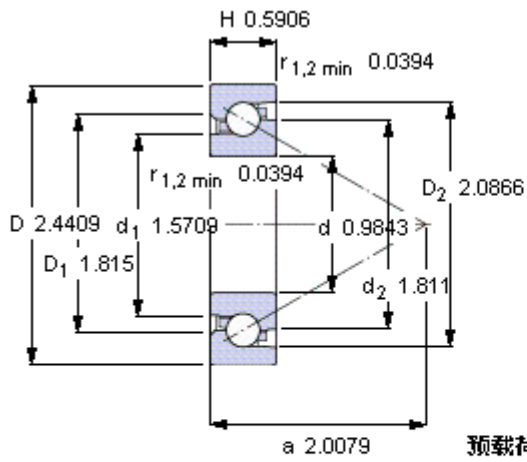

预载荷等级

	A	B
Preload¹⁾ [N]	2150	4300
Frictional moment¹⁾ [Nm] (guideline value)	0,115	0,21
Static axial stiffness¹⁾ [N/μm] (guideline value)	870	1110

Max. axial load carrying capacity

(guideline value)
22,6

Reference grease quantity [cm³]

G_{ref} 2

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face