


FAG NJ2309-E-TVP2 + HJ2309-E参数

基本额定载荷	C_{0r}	154000	N	基本额定静载荷，径向
极限转速	n_G	8500	r/min	极限转速
参考转速	n_B	5400	r/min	参考速度
疲劳极限载荷	C_{ur}	28000	N	疲劳极限载荷，径向
尺寸	d	45	mm	-
	D	100	mm	-
	B	36	mm	-
	B_1	7	mm	-
	B_2	13	mm	-
	D_1	84.1	mm	-
	$D_{a\ max}$	91	mm	-
	d_1	64.4	mm	-
	$d_{a\ max}$	57	mm	-
	$d_{a\ min}$	54	mm	-
	$d_{c\ min}$	66	mm	-
	E	88.5	mm	-
	F	58.5	mm	-
	$r_{1\ min}$	1.5	mm	-
	$r_{a\ max}$	1.5	mm	-
	$r_{al\ max}$	1.5	mm	-
	r_{min}	1.5	mm	-
	s	2.5	mm	距离中心位置的轴向偏移
说明		HJ2309-E		型号，L 型圈
重量	m	1330	g	质量
	m_1	115	g	质量，L 型圈
基本额定载荷	C_r	163000	N	基本额定动载荷，径向

FAG NJ2309-E-TVP2 + HJ2309-E图片

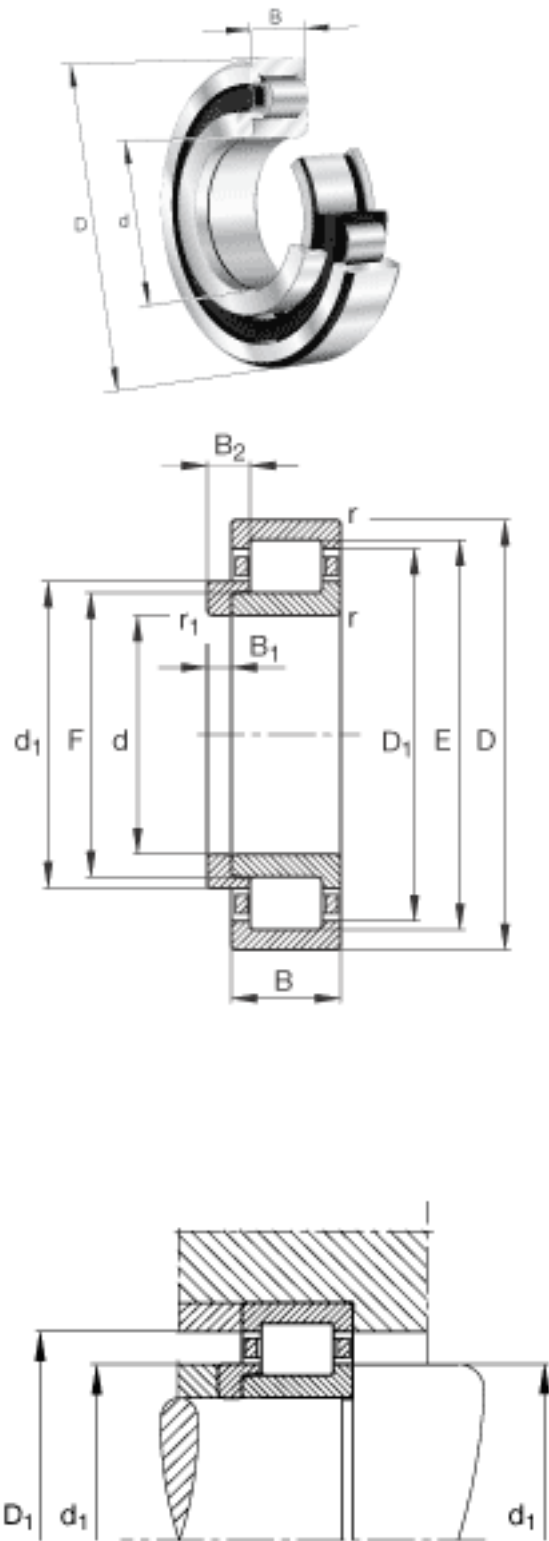

参考资料:<http://www.sozhou.com/p/d6571769.html>

