


NSK 54211U参数

外形尺寸	SR1	0.6	mm	(最小)	
基本额定载荷	CAN	70000	N	动载荷	
	COAN	159000	N	静载荷	
	CA	7150	kgf	动载荷	
	COA	16200	kgf	静载荷	
极限转速	GRE	2000	1/min	脂润滑	
	OIL	3000	1/min	油润滑	
尺寸	SD3	90.0	mm	-	
	D1	57	mm	-	
	D2	72	mm	-	
	D3	95	mm	-	
	T2	27.5	mm	-	
	T6	29.8	mm	-	
	T8	32.5	mm	-	
	B	10	mm	-	
	SB	9.0	mm	-	
	A1	32.5	mm	-	
	R	72	mm	-	
	安装尺寸	DA	72	mm	(最大)
		SRA	1.0	mm	(最大)
SRB		0.6	mm	(最大)	
重量	MASS	1550	g	重量	
型号	型号	54211U		-	
外形尺寸	SD2	45	mm	内径	
	SD	55	mm	外径	
	D	90	mm	宽度	
	T1	45	mm	-	
	T5	49.6	mm	-	
	T7	55	mm	-	
	SR	1.0	mm	(最小)	

NSK 54211U图片

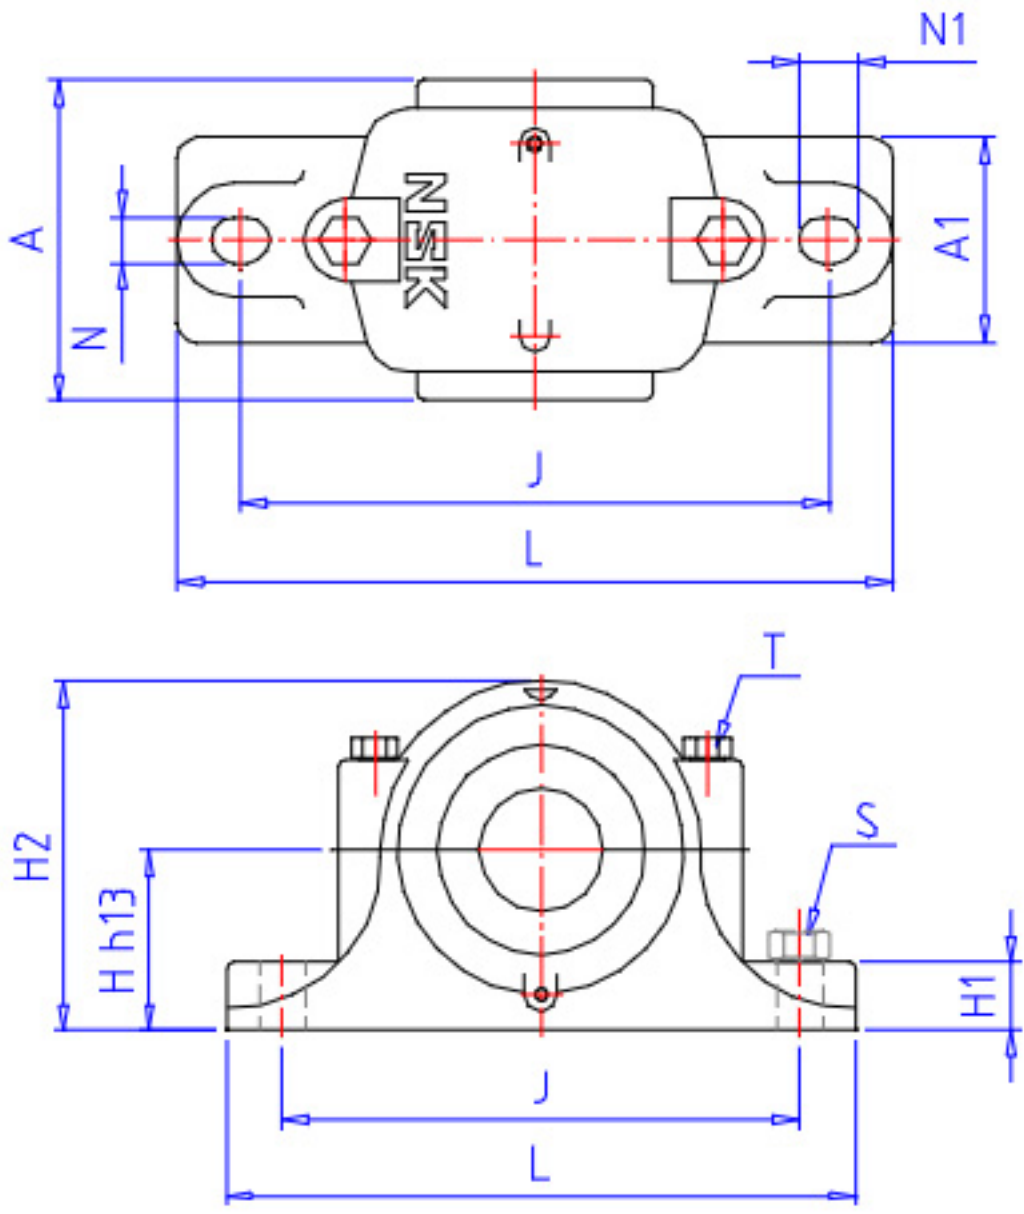

参考资料:<http://www.sozhou.com/p/df40ad4b.html>

