


### FAG NUP2324-E-M1 参数

尺寸	d	120	mm	-
	D	260	mm	-
	B	86	mm	-
	B <sub>3</sub>	12	mm	-
	D <sub>1</sub>	218.7	mm	-
	D <sub>a max</sub>	246	mm	-
	d <sub>1</sub>	168.1	mm	-
	d <sub>a max</sub>	151	mm	-
	d <sub>a min</sub>	134	mm	-
	d <sub>c min</sub>	171	mm	-
	F	154	mm	-
	r <sub>1 min</sub>	3	mm	-
	r <sub>a max</sub>	2.5	mm	-
	r <sub>al max</sub>	2.5	mm	-
	r <sub>min</sub>	3	mm	-
	s	0	mm	距离中心位置的轴向偏移
重量	m	24100	g	质量
基本额定载荷	C <sub>r</sub>	930000	N	基本额定动载荷，径向
	C <sub>0r</sub>	1010000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	3950	r/min	极限转速
参考转速	n <sub>B</sub>	2010	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	165000	N	疲劳极限载荷，径向

### FAG NUP2324-E-M1 图片

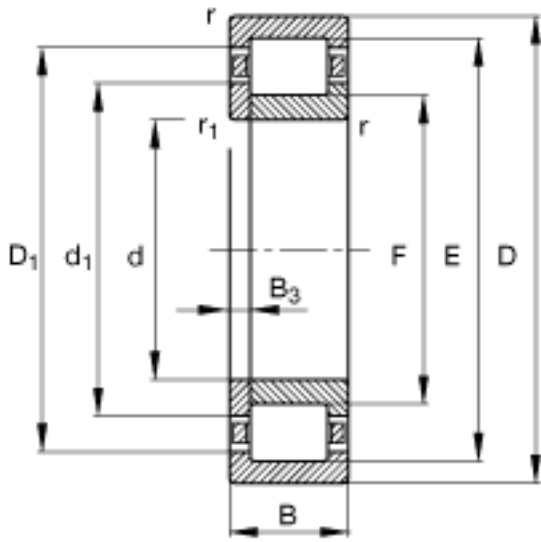

参考资料:<http://www.sozhou.com/p/e11f1103.html>

