


## NSK 54320U参数

外形尺寸	D	170	mm	宽度	
	T1	97	mm	-	
	T5	105.4	mm	-	
	T7	115	mm	-	
	SR	1.5	mm	(最小)	
	SR1	1.0	mm	(最小)	
基本额定载荷	CAN	239000	N	动载荷	
	COAN	595000	N	静载荷	
	CA	24300	kgf	动载荷	
	COA	61000	kgf	静载荷	
极限转速	GRE	950	1/min	脂润滑	
	OIL	1500	1/min	油润滑	
尺寸	SD3	170.0	mm	-	
	D1	103	mm	-	
	D2	135	mm	-	
	D3	175	mm	-	
	T2	59.0	mm	-	
	T6	63.2	mm	-	
	T8	68.0	mm	-	
	B	21	mm	-	
	SB	18.0	mm	-	
	A1	42.0	mm	-	
	R	125	mm	-	
	安装尺寸	DA	135	mm	(最大)
		SRA	1.5	mm	(最大)
SRB		1.0	mm	(最大)	
重量	MASS	11600	g	重量	
型号	型号	54320U		-	
外形尺寸	SD2	85	mm	内径	
	SD	100	mm	外径	

## NSK 54320U图片

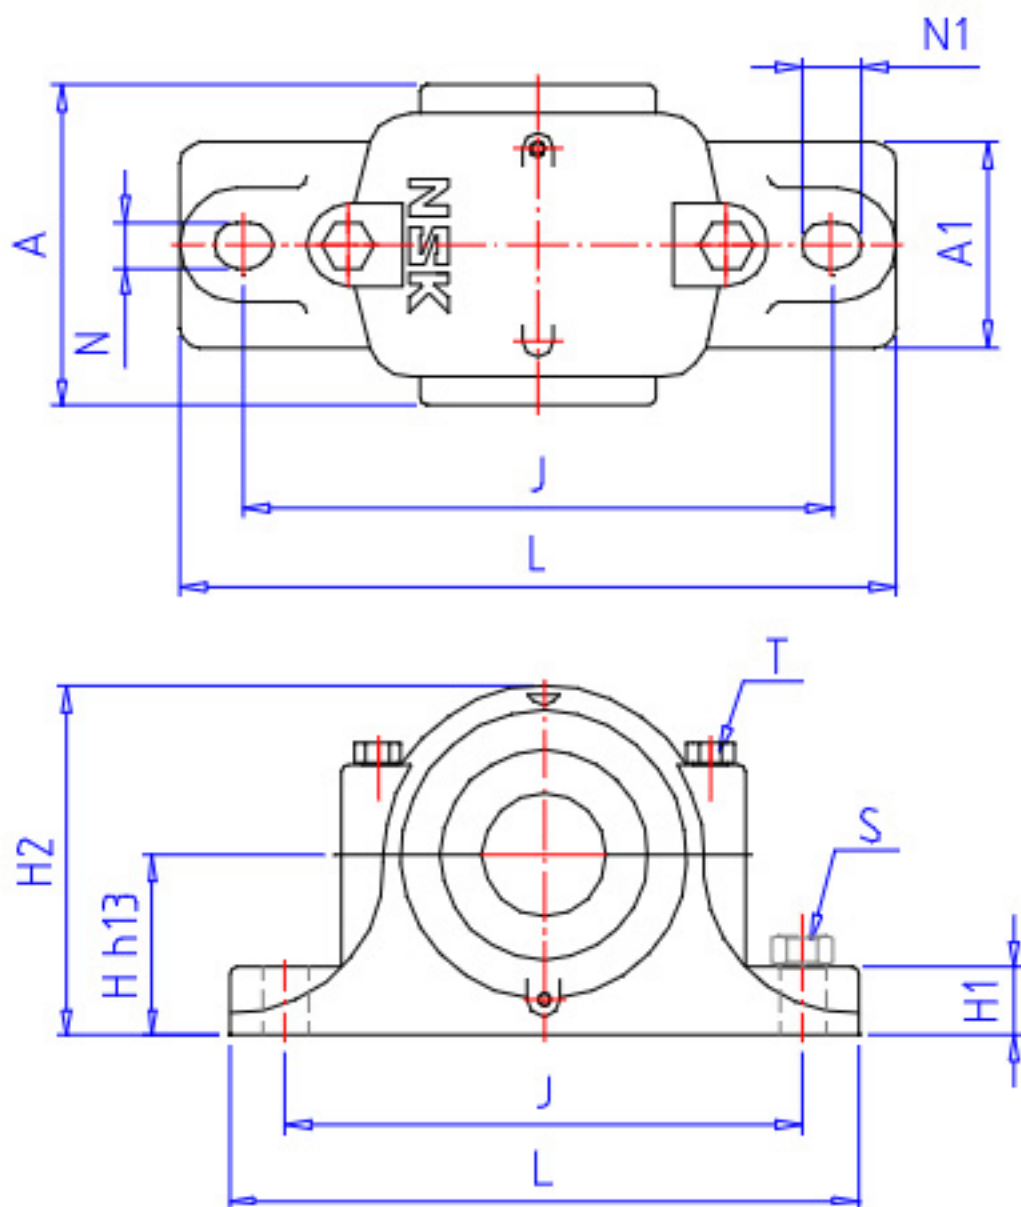

参考资料:<http://www.sozhou.com/p/e5c5f50f.html>

