
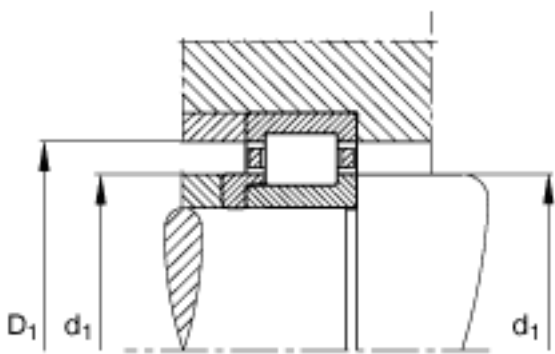


FAG NJ2328-E-M1 + HJ2328-E参数

基本额定载荷	C_{0r}	1390000	N	基本额定静载荷，径向	
极限转速	n_G	3450	r/min	极限转速	
参考转速	n_B	1640	r/min	参考速度	
疲劳极限载荷	C_{ur}	219000	N	疲劳极限载荷，径向	
尺寸	D_1	251.7	mm	-	
	$D_{a \max}$	283	mm	-	
	d_1	195.4	mm	-	
	$d_{a \max}$	176	mm	-	
	$d_{a \min}$	157	mm	-	
	$d_{c \min}$	198	mm	-	
	E	264	mm	-	
	F	180	mm	-	
	$r_{1 \min}$	4	mm	-	
	$r_{a \max}$	3	mm	-	
	$r_{al \max}$	3	mm	-	
	r_{\min}	4	mm	-	
		s	9.2	mm	距离中心位置的轴向偏移
	说明		HJ2328-E		型号，L 型圈
重量	m	36600	g	质量	
	m_1	2200	g	质量，L 型圈	
基本额定载荷	C_r	1210000	N	基本额定动载荷，径向	
尺寸	d	140	mm	-	
	D	300	mm	-	
	B	102	mm	-	
	B_1	15	mm	-	
	B_2	31	mm	-	

FAG NJ2328-E-M1 + HJ2328-E图片

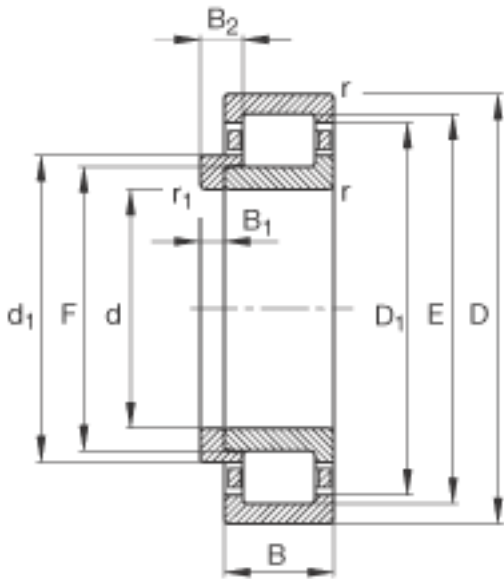

参考资料:<http://www.sozhou.com/p/f0ce19f6.html>

