
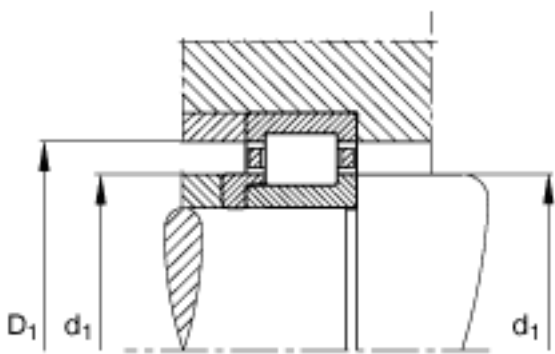


FAG NJ317-E-TVP2 + HJ317-E参数

| | | | | |
|--------|---------------------|---------|-------|-------------|
| 尺寸 | B | 41 | mm | - |
| | B ₁ | 12 | mm | - |
| | B ₂ | 18.5 | mm | - |
| | D ₁ | 152.7 | mm | - |
| | D _{a max} | 166 | mm | - |
| | d ₁ | 117.8 | mm | - |
| | d _{a max} | 106 | mm | - |
| | d _{a min} | 99 | mm | - |
| | d _{c min} | 119 | mm | - |
| | E | 160 | mm | - |
| | F | 108 | mm | - |
| | r _{1 min} | 3 | mm | - |
| | r _{a max} | 2.5 | mm | - |
| | r _{al max} | 2.5 | mm | - |
| | r _{min} | 3 | mm | - |
| | s | 1.3 | mm | 距离中心位置的轴向偏移 |
| 说明 | | HJ317-E | | 型号, L 型圈 |
| 重量 | m | 4710 | g | 质量 |
| | m ₁ | 566 | g | 质量, L 型圈 |
| 基本额定载荷 | C _r | 320000 | N | 基本额定动载荷, 径向 |
| | C _{0r} | 300000 | N | 基本额定静载荷, 径向 |
| 极限转速 | n _G | 4550 | r/min | 极限转速 |
| 参考转速 | n _B | 4000 | r/min | 参考速度 |
| 疲劳极限载荷 | C _{ur} | 53000 | N | 疲劳极限载荷, 径向 |
| 尺寸 | d | 85 | mm | - |
| | D | 180 | mm | - |

FAG NJ317-E-TVP2 + HJ317-E图片

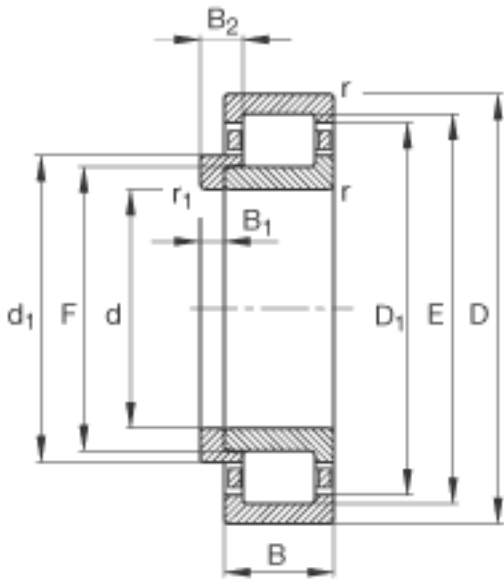

参考资料:<http://www.sozhou.com/p/fe4c81ad.html>

