


FAG NJ2224-E-TVP2 + HJ2224-E参数

尺寸	d	120	mm	-	
	D	215	mm	-	
	B	58	mm	-	
	B ₁	11	mm	-	
	B ₂	20	mm	-	
	D ₁	187.8	mm	-	
	D _{a max}	203	mm	-	
	d ₁	153.2	mm	-	
	d _{a max}	141	mm	-	
	d _{a min}	132	mm	-	
	d _{c min}	156	mm	-	
	E	195.5	mm	-	
	F	143.5	mm	-	
	r _{1 min}	2.1	mm	-	
	r _{a max}	2.1	mm	-	
	r _{al max}	2.1	mm	-	
	r _{min}	2.1	mm	-	
	s	4.5	mm	距离中心位置的轴向偏移	
	说明		HJ2224-E		型号, L 型圈
	重量	m	8540	g	质量
m ₁		750	g	质量, L 型圈	
基本额定载荷	C _r	530000	N	基本额定动载荷, 径向	
	C _{0r}	610000	N	基本额定静载荷, 径向	
极限转速	n _G	3750	r/min	极限转速	
参考转速	n _B	2550	r/min	参考速度	
疲劳极限载荷	C _{ur}	103000	N	疲劳极限载荷, 径向	

FAG NJ2224-E-TVP2 + HJ2224-E图片

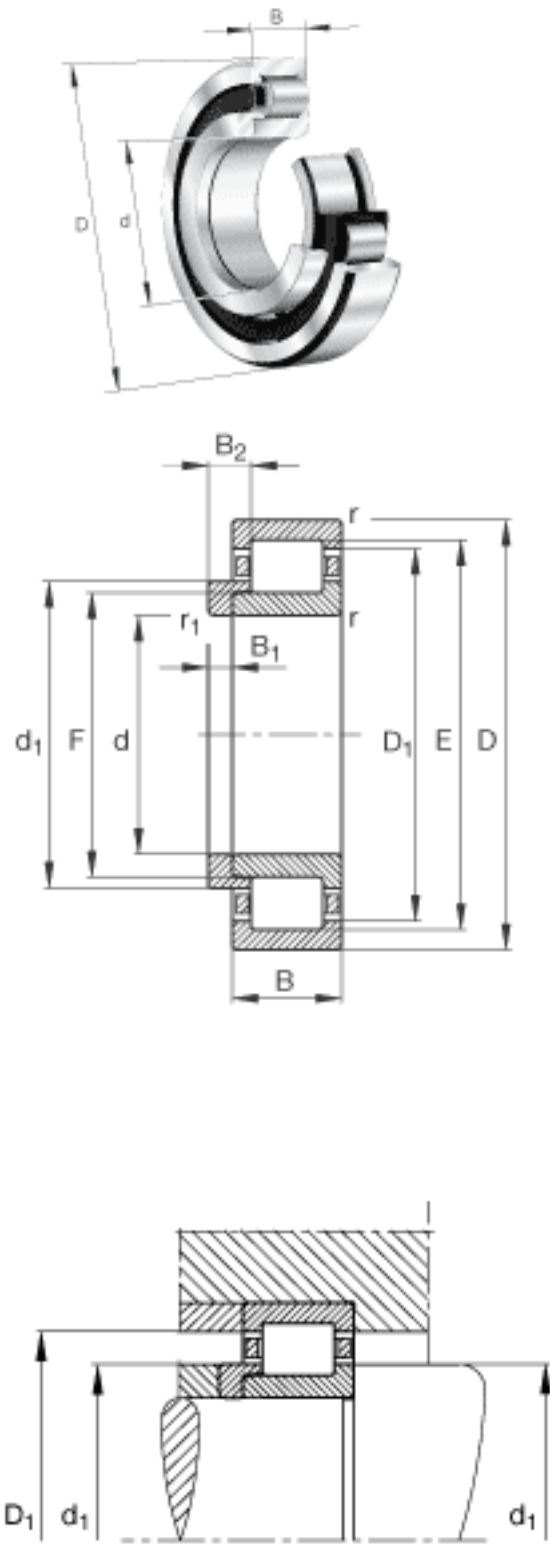

参考资料:<http://www.sozhou.com/p/91b54be4.html>

