


FAG NJ2312-E-TVP2 + HJ2312-E参数

尺寸	$r_{al\ max}$	2.1	mm	-
	$r_{min}$	2.1	mm	-
	s	3.5	mm	距离中心位置的轴向偏移
说明		HJ2312-E		型号, L 型圈
重量	m	2830	g	质量
	$m_1$	238	g	质量, L 型圈
基本额定载荷	$C_r$	265000	N	基本额定动载荷, 径向
	$C_{0r}$	260000	N	基本额定静载荷, 径向
极限转速	$n_G$	6500	r/min	极限转速
参考转速	$n_B$	4300	r/min	参考速度
疲劳极限载荷	$C_{ur}$	49500	N	疲劳极限载荷, 径向
尺寸	d	60	mm	-
	D	130	mm	-
	B	46	mm	-
	$B_1$	9	mm	-
	$B_2$	16	mm	-
	$D_1$	109.6	mm	-
	$D_{a\ max}$	118	mm	-
	$d_1$	84.4	mm	-
	$d_{a\ max}$	75	mm	-
	$d_{a\ min}$	72	mm	-
	$d_{c\ min}$	86	mm	-
	E	115	mm	-
	F	77	mm	-
	$r_{1\ min}$	2.1	mm	-
	$r_{a\ max}$	2.1	mm	-

FAG NJ2312-E-TVP2 + HJ2312-E图片

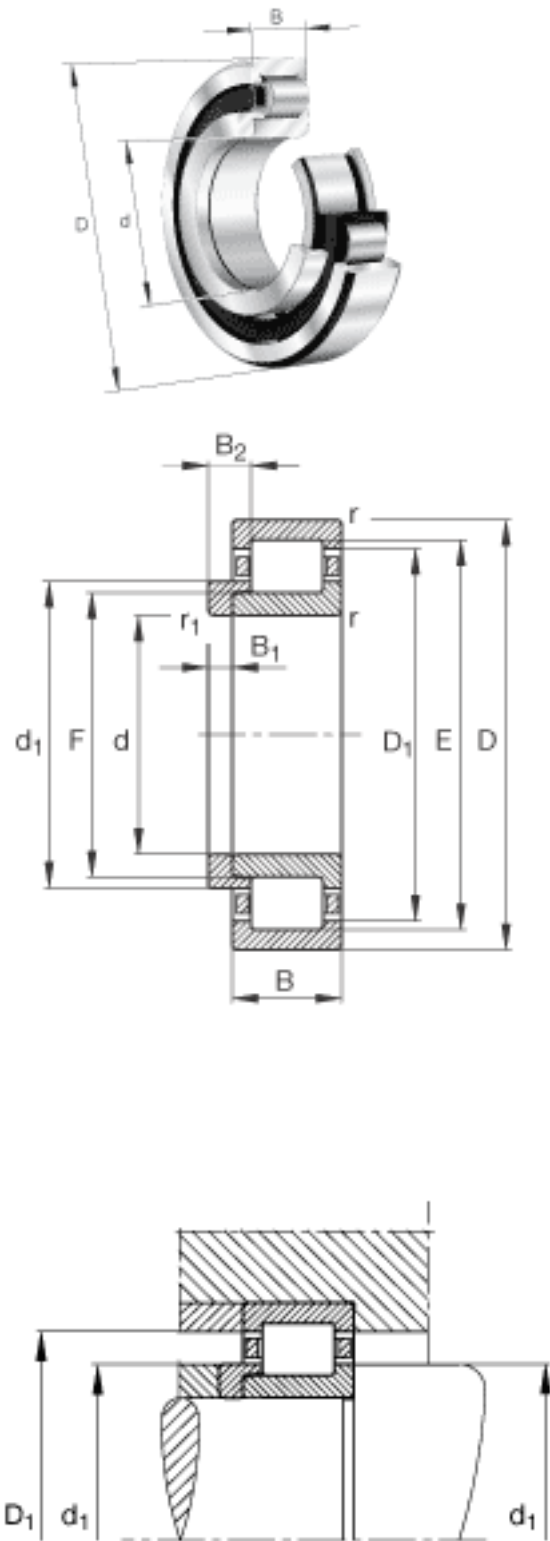

参考资料:<http://www.sozhou.com/p/9a1c4c79.html>

