


FAG 239/750-K-MB + AH39/750参数

尺寸	d_{1H}	710	mm	-
	d_{2G}	Tr780x7		-
	$d_{a \min}$	773	mm	-
	d_s	12.5	mm	-
	l	234	mm	-
	n_s	23.5	mm	-
	$r_{a \max}$	5	mm	-
	r_{\min}	6	mm	-
说明		AH39/750		型号, 退卸套
重量	m	394000	g	质量
	m_1	110000	g	质量, 退卸套
基本额定载荷	C_r	5200000	N	基本额定动载荷, 径向
计算系数	e	0.17		-
	Y_1	3.95		-
	Y_2	5.88		-
基本额定载荷	C_{0r}	12900000	N	基本额定静载荷, 径向
计算系数	Y_0	3.86		-
极限转速	n_G	640	r/min	极限转速
参考转速	n_B	325	r/min	参考速度
疲劳极限载荷	C_{ur}	790000	N	疲劳极限载荷, 径向
尺寸	D	1000	mm	-
	a	12	mm	-
	B	185	mm	-
	b	44	mm	-
	D_1	923.2	mm	-
	$D_{a \max}$	977	mm	-
	d	750	mm	-

FAG 239/750-K-MB + AH39/750图片

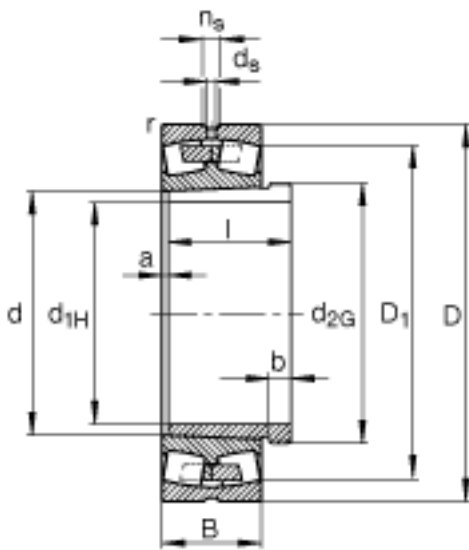

参考资料:<http://www.sozhou.com/p/ee005143.html>