
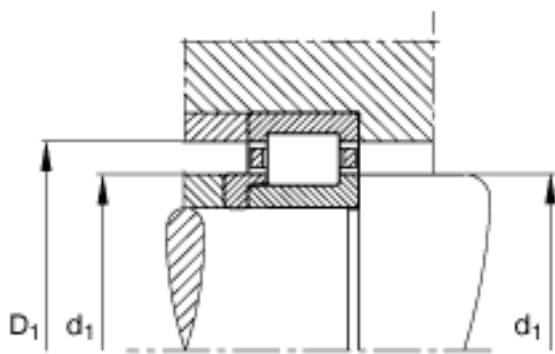


FAG NJ230-E-M1 + HJ230-E参数

尺寸	d	150	mm	-	
	D	270	mm	-	
	B	45	mm	-	
	B ₁	12	mm	-	
	B ₂	19.5	mm	-	
	D ₁	233.2	mm	-	
	D _{a max}	256	mm	-	
	d ₁	193.1	mm	-	
	d _{a max}	179	mm	-	
	d _{a min}	164	mm	-	
	d _{c min}	196	mm	-	
	E	242	mm	-	
	F	182	mm	-	
	r _{1 min}	3	mm	-	
	r _{a max}	2.5	mm	-	
	r _{al max}	2.5	mm	-	
	r _{min}	3	mm	-	
	s	4	mm	距离中心位置的轴向偏移	
	说明		HJ230-E		型号, L 型圈
	重量	m	12000	g	质量
m ₁		1260	g	质量, L 型圈	
基本额定载荷	C _r	520000	N	基本额定动载荷, 径向	
	C _{0r}	590000	N	基本额定静载荷, 径向	
极限转速	n _G	3950	r/min	极限转速	
参考转速	n _B	2380	r/min	参考速度	
疲劳极限载荷	C _{ur}	89000	N	疲劳极限载荷, 径向	

FAG NJ230-E-M1 + HJ230-E图片

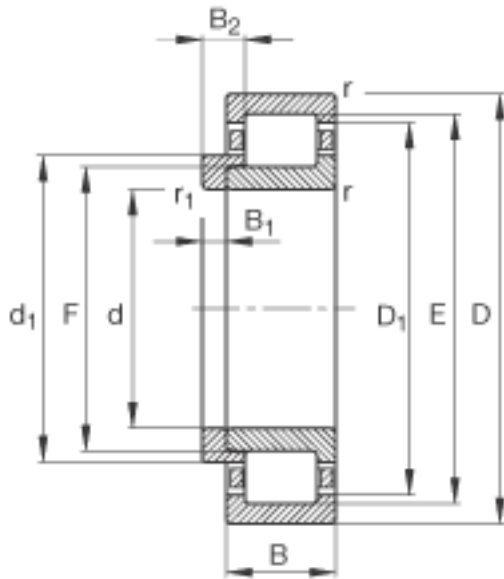

参考资料:<http://www.sozhou.com/p/05a5b776.html>

