


FAG NJ2307-E-TVP2 + HJ2307-E参数

尺寸	d	35	mm	-	
	D	80	mm	-	
	B	31	mm	-	
	B <sub>1</sub>	6	mm	-	
	B <sub>2</sub>	11	mm	-	
	D <sub>1</sub>	66.6	mm	-	
	D <sub>a max</sub>	71	mm	-	
	d <sub>1</sub>	51	mm	-	
	d <sub>a max</sub>	45	mm	-	
	d <sub>a min</sub>	42	mm	-	
	d <sub>c min</sub>	53	mm	-	
	E	70.2	mm	-	
	F	46.2	mm	-	
	r <sub>1 min</sub>	1.1	mm	-	
	r <sub>a max</sub>	1.5	mm	-	
	r <sub>al max</sub>	1	mm	-	
	r <sub>min</sub>	1.5	mm	-	
	s	2.1	mm	距离中心位置的轴向偏移	
	说明		HJ2307-E		型号, L 型圈
	重量	m	736	g	质量
m <sub>1</sub>		63	g	质量, L 型圈	
基本额定载荷	C <sub>r</sub>	108000	N	基本额定动载荷, 径向	
	C <sub>0r</sub>	98000	N	基本额定静载荷, 径向	
极限转速	n <sub>G</sub>	10900	r/min	极限转速	
参考转速	n <sub>B</sub>	6700	r/min	参考速度	
疲劳极限载荷	C <sub>ur</sub>	17500	N	疲劳极限载荷, 径向	

FAG NJ2307-E-TVP2 + HJ2307-E图片

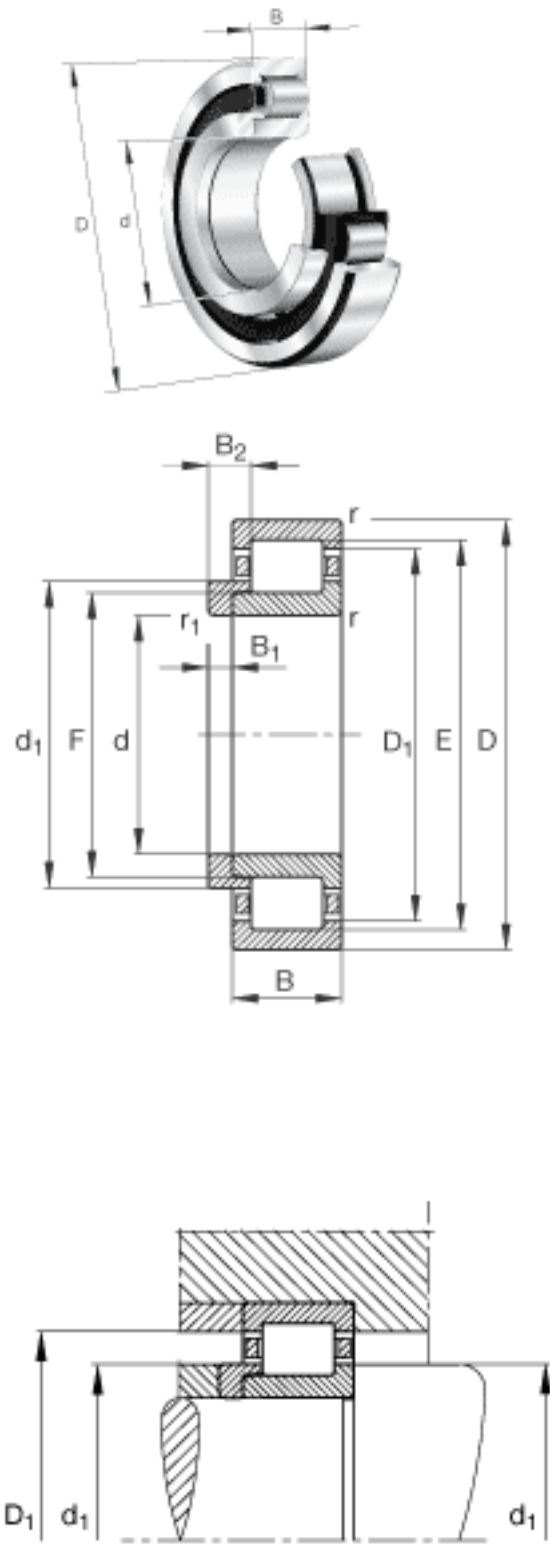

参考资料:<http://www.sozhou.com/p/12ff0307.html>

