


FAG NJ303-E-TVP2 + HJ303-E参数

尺寸	d	17	mm	-	
	D	47	mm	-	
	B	14	mm	-	
	B ₁	4	mm	-	
	B ₂	6.5	mm	-	
	D ₁	37.1	mm	-	
	D _{a max}	42.8	mm	-	
	d ₁	27.6	mm	-	
	d _{a max}	23.5	mm	-	
	d _{a min}	21.2	mm	-	
	d _{c min}	28	mm	-	
	E	40.2	mm	-	
	F	24.2	mm	-	
	r _{1 min}	0.6	mm	-	
	r _{a max}	1	mm	-	
	r _{al max}	0.6	mm	-	
	r _{min}	1	mm	-	
	s	1.2	mm	距离中心位置的轴向偏移	
	说明		HJ303-E		型号, L 型圈
	重量	m	124	g	质量
m ₁		14	g	质量, L 型圈	
基本额定载荷	C _r	30000	N	基本额定动载荷, 径向	
	C _{0r}	21200	N	基本额定静载荷, 径向	
极限转速	n _G	19600	r/min	极限转速	
参考转速	n _B	13700	r/min	参考速度	
疲劳极限载荷	C _{ur}	3350	N	疲劳极限载荷, 径向	

FAG NJ303-E-TVP2 + HJ303-E图片

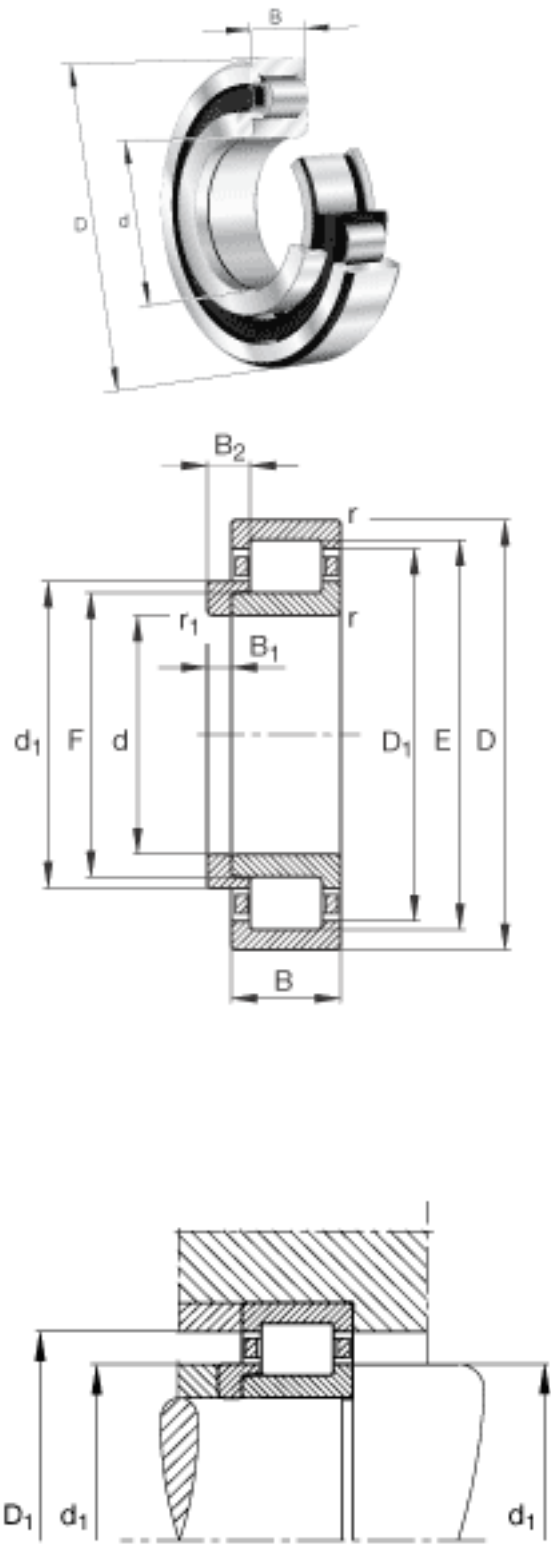

参考资料:<http://www.sozhou.com/p/20c87b73.html>

