
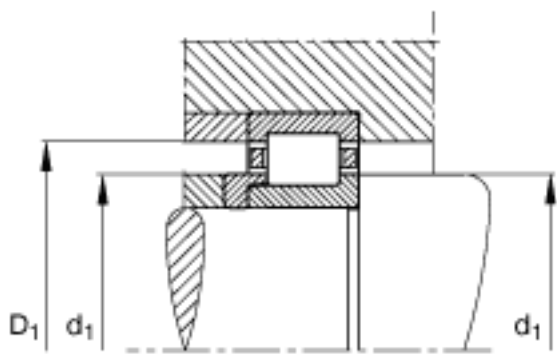


FAG NJ312-E-TVP2 + HJ312-E参数

极限转速	n_G	6500	r/min	极限转速
参考转速	n_B	5300	r/min	参考速度
疲劳极限载荷	C_{ur}	28500	N	疲劳极限载荷, 径向
尺寸	d	60	mm	-
	D	130	mm	-
	B	31	mm	-
	B_1	9	mm	-
	B_2	14.5	mm	-
	D_1	109.6	mm	-
	$D_{a\ max}$	118	mm	-
	d_1	84.4	mm	-
	$d_{a\ max}$	75	mm	-
	$d_{a\ min}$	72	mm	-
	$d_{c\ min}$	86	mm	-
	E	115	mm	-
	F	77	mm	-
	$r_{1\ min}$	2.1	mm	-
	$r_{a\ max}$	2.1	mm	-
	$r_{al\ max}$	2.1	mm	-
	r_{min}	2.1	mm	-
	s	1.8	mm	距离中心位置的轴向偏移
说明		HJ312-E		型号, L 型圈
重量	m	1890	g	质量
	m_1	229	g	质量, L 型圈
基本额定载荷	C_r	177000	N	基本额定动载荷, 径向
	C_{0r}	157000	N	基本额定静载荷, 径向

FAG NJ312-E-TVP2 + HJ312-E图片

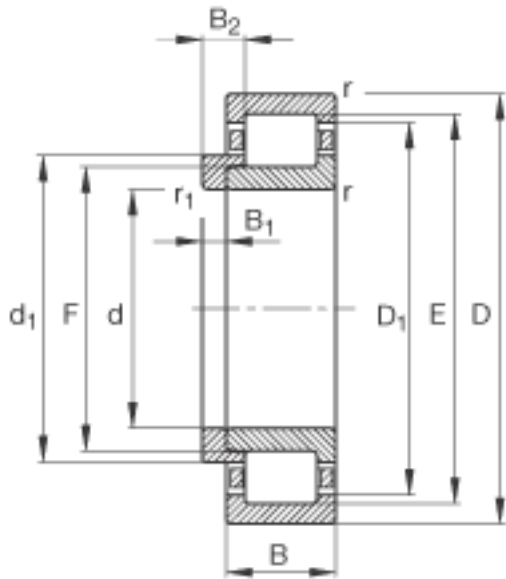

参考资料:<http://www.sozhou.com/p/c9383de8.html>

