


FAG NJ2314-E-TVP2 + HJ2314-E参数

尺寸	$d_{c \min}$	100	mm	-	
	E	133	mm	-	
	F	89	mm	-	
	$r_{l \min}$	2.1	mm	-	
	$r_{a \max}$	2.1	mm	-	
	d	70	mm	-	
	D	150	mm	-	
	B	51	mm	-	
	B_1	10	mm	-	
	B_2	18.5	mm	-	
	D_1	126.8	mm	-	
	$D_{a \max}$	138	mm	-	
	d_1	97.4	mm	-	
	$d_{a \max}$	87	mm	-	
	$d_{a \min}$	82	mm	-	
	$r_{al \max}$	2.1	mm	-	
	r_{\min}	2.1	mm	-	
	s	4.7	mm	距离中心位置的轴向偏移	
	说明		HJ2314-E		型号, L 型圈
	重量	m	4100	g	质量
m_1		352	g	质量, L 型圈	
基本额定载荷	C_r	325000	N	基本额定动载荷, 径向	
	C_{0r}	325000	N	基本额定静载荷, 径向	
极限转速	n_G	5500	r/min	极限转速	
参考转速	n_B	3850	r/min	参考速度	
疲劳极限载荷	C_{ur}	59000	N	疲劳极限载荷, 径向	

FAG NJ2314-E-TVP2 + HJ2314-E图片

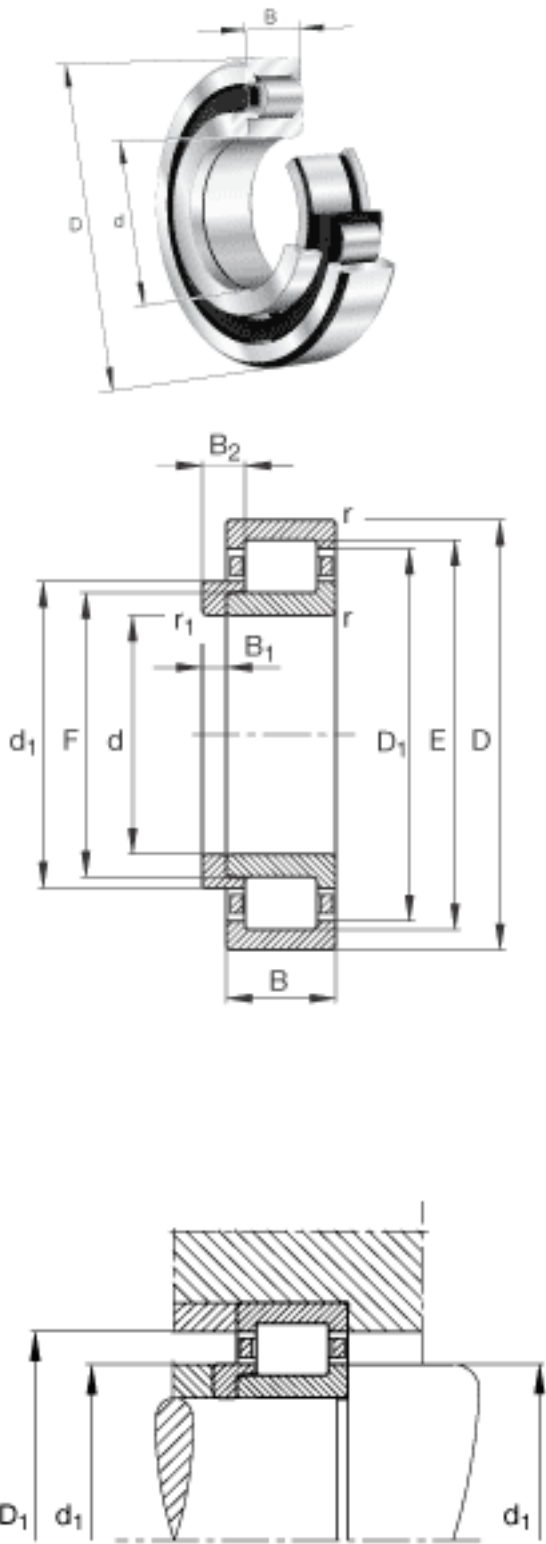

参考资料:<http://www.sozhou.com/p/d72c4e7d.html>

